
Product data sheet





GF Uponor S-Press reducer 40-25

1046930

- Made of tin-plated DR brass (lead-free)
- Fast installation with easy bevel and without calibration
- Colour code

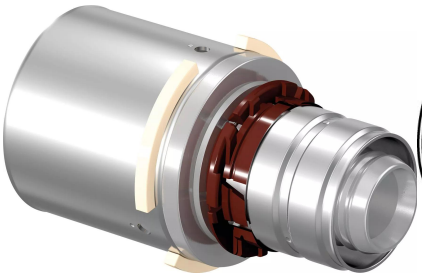

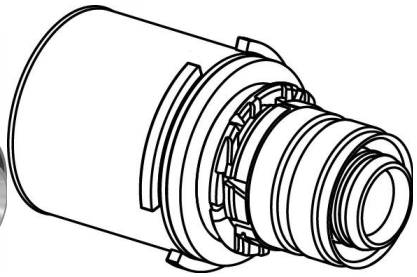



Application information GF Uponor S-Press reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press reducer 40-25

1046930

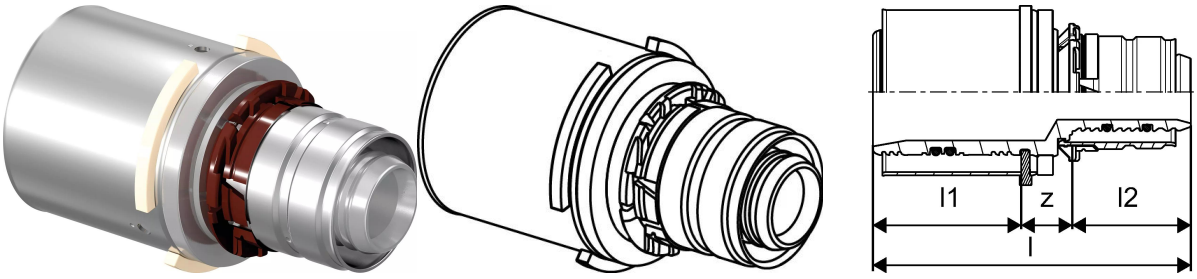

Status

Item Available Till date	2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114272
Item no GF	35001046930
Item no GTIN	04021598114272
Item no VVS	045480417
Item Replacement 1	1137428

Dimensions

Item Unit Height	80
Item Unit Length	42
Item Unit Weight	0,19
Item Unit Width	42
Item_UOM	pce

Measurements

LENGTH_L	81,2
Length (l1)	37,9
Length (l2)	30,3
z1	13

Packaging

Packaging GTIN PL1	06414905460700
Packaging GTIN PL4	06414905493517
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,989
Packaging Weight PL4	209,224
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+