


## Uponor S-Press coupling 40-40

**1046932**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

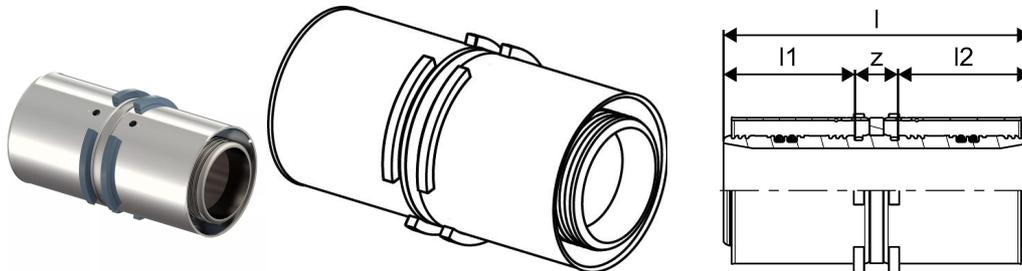

### Application information Uponor S-Press coupling

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press coupling 40-40

1046932

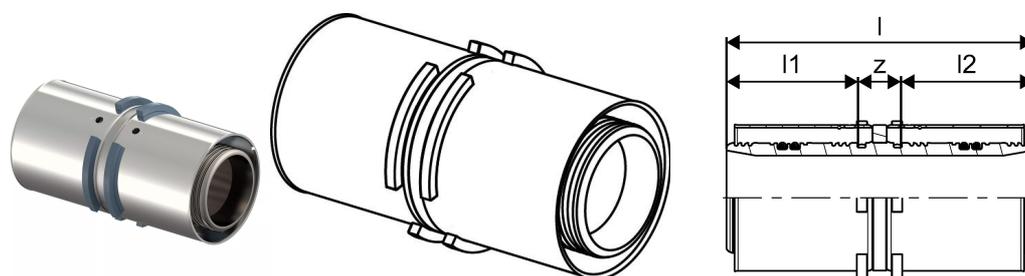

### Product code

Item no EAN	4021598114296
Item no GF	35001046932
Item no GTIN	04021598114296
Item no VVS	045480040

### Dimensions

Item Unit Height	45
Item Unit Length	85
Item Unit Weight	0,27
Item Unit Width	45
Item_UOM	pce

### Measurements

LENGTH_L	88
Length (l1)	37,8
Length (l2)	37,9
z1	12,3

### Packaging

Packaging GTIN PL1	06414905401673
Packaging GTIN PL4	06414905401680
Packaging Height PL1	89
Packaging Height PL4	540
Packaging Length PL1	135
Packaging Length PL4	1080
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001045305

Packaging Volume PL4	0,40824
Packaging Weight PL1	1,416
Packaging Weight PL4	219,763
Packaging Width PL1	87
Packaging Width PL4	700

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)