


Uponor S-Press coupling 40-40

1046932

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

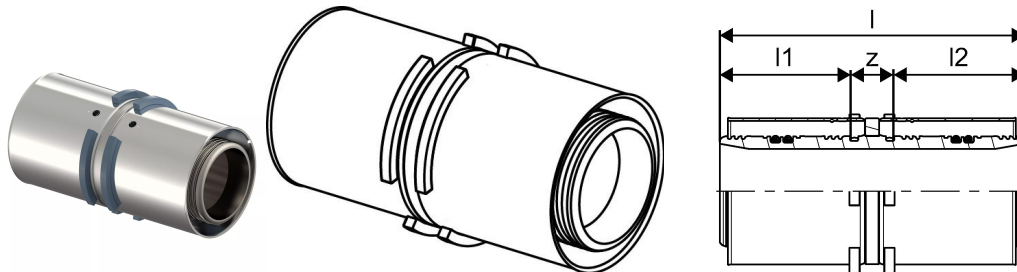

Application information Uponor S-Press coupling

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press coupling 40-40

1046932

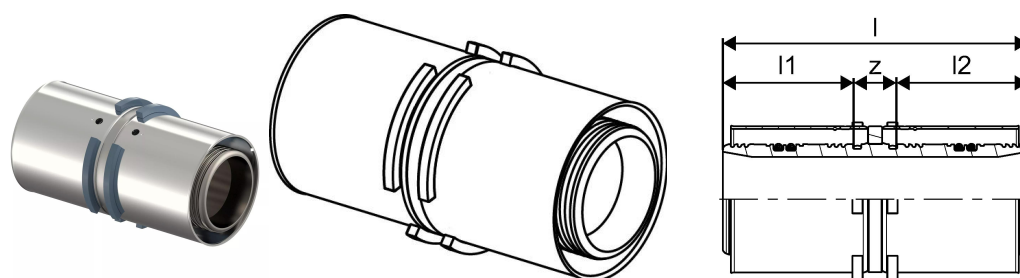

Product code

Item no EAN	4021598114296
Item no GF	35001046932
Item no GTIN	04021598114296
Item no VVS	045480040

Dimensions

Item Unit Height	45
Item Unit Length	85
Item Unit Weight	0,27
Item Unit Width	45
Item_UOM	pce

Measurements

LENGTH_L	88
Length (l1)	37,8
Length (l2)	37,9
z1	12,3

Packaging

Packaging GTIN PL1	06414905401673
Packaging GTIN PL4	06414905401680
Packaging Height PL1	89
Packaging Height PL4	540
Packaging Length PL1	135
Packaging Length PL4	1080
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001045305

Packaging Volume PL4	0,40824
Packaging Weight PL1	1,416
Packaging Weight PL4	219,763
Packaging Width PL1	87
Packaging Width PL4	700

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com