
Product data sheet





GF Uponor S-Press adapter swivel nut 40-G1 1/2"SN

1046937

- Made of tin-plated DR brass (lead-free)
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.



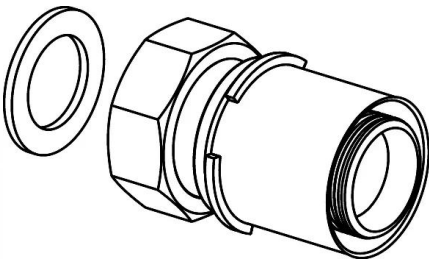



Application information GF Uponor S-Press adapter swivel nut

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:
Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press adapter swivel nut 40-G1 1/2"SN

1046937



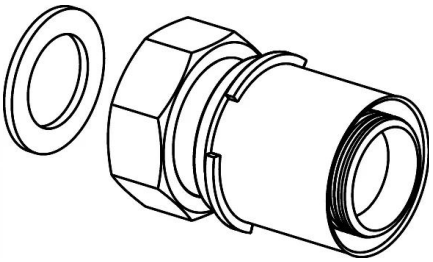



Measurements

Cylindric_thread_G	1,5
LENGTH_L	77,2
Length (l1)	9,5
Length (l2)	37,9
z1	29,8

Product code

Item no EAN	4021598114333
Item no GF	35001046937
Item no GTIN	04021598114333
Item no LVI	1720956
Item no NRF	1627558
Item no VVS	045483042

Dimensions

Item Unit Height	55
Item Unit Length	74
Item Unit Weight	0,358
Item Unit Width	55
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401734
Packaging GTIN PL4	06414905401741
Packaging Height PL1	89
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL4	1120

Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,829
Packaging Weight PL4	361,19
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+