


Uponor RS adapter S-Press 40-RS2

1046940

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

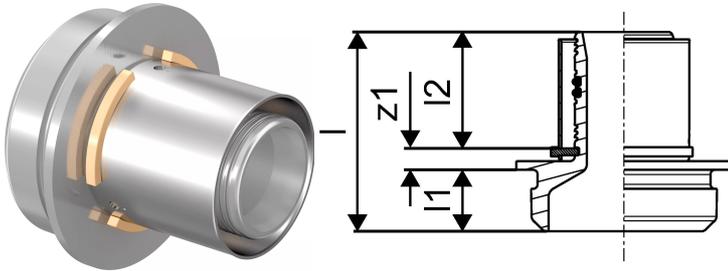

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 40-RS2

1046940

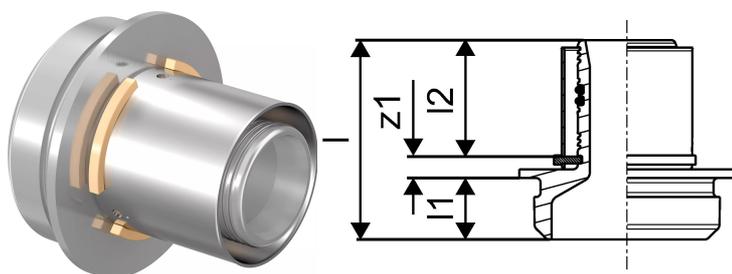

Product code

Item no EAN	4021598114364
Item no GF	35001046940
Item no GTIN	04021598114364
Item no NRF	5071231
Item no VVS	045450040

Dimensions

Item Unit Height	65
Item Unit Length	67
Item Unit Weight	0,38
Item Unit Width	67
Item_UOM	pce

Measurements

LENGTH_L	64,8
Length (l1)	20
Length (l2)	37,9
z1	6,9

Packaging

Packaging GTIN PL1	06414905401772
Packaging GTIN PL4	06414905401789
Packaging Height PL1	85
Packaging Height PL4	654
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00102
Packaging Volume PL4	0,62784
Packaging Weight PL1	0,44
Packaging Weight PL4	209,224
Packaging Width PL1	100
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com