
Product data sheet



GF Uponor RS adapter S-Press 50-RS2

1046941

- Made of tin-plated DR brass (lead-free)
- Fits to all RS2 or RS3 base parts.

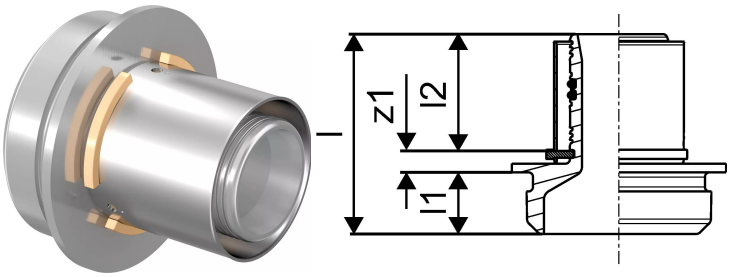

Application information GF Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS adapter S-Press 50-RS2

1046941

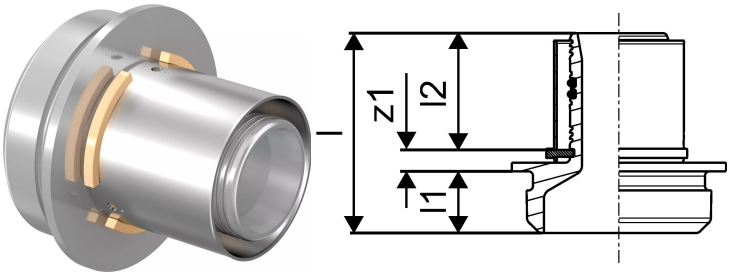

Product code

Item no EAN	4021598114371
Item no GF	35001046941
Item no GTIN	04021598114371
Item no LVI	1720821
Item no NRF	5071232
Item no VVS	045450050

Dimensions

Item Unit Height	69
Item Unit Length	67
Item Unit Weight	0,409
Item Unit Width	69
Item_UOM	pce

Measurements

LENGTH_L	64,8
Length (l1)	20
Length (l2)	37,9
z1	6,9

Packaging

Packaging GTIN PL1	06414905401796
Packaging GTIN PL4	06414905401802
Packaging Height PL1	84
Packaging Height PL4	800
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001008
Packaging Volume PL4	0,768
Packaging Weight PL1	0,8
Packaging Weight PL4	223,283
Packaging Width PL1	100
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+