


## Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

**1047013**

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass

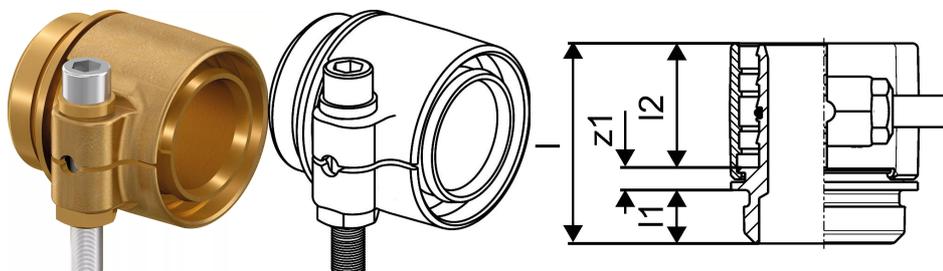

### Application information Uponor Wipex RS adapter PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

1047013

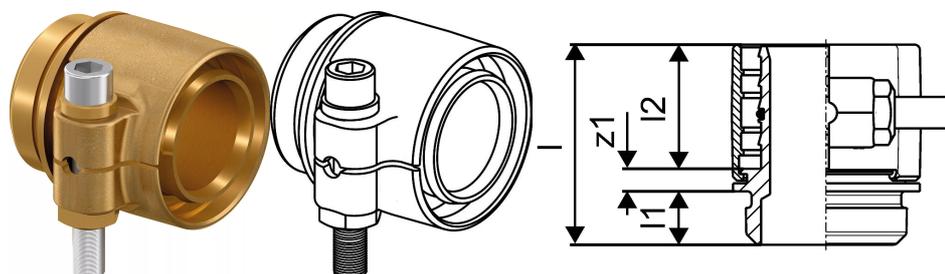

### Product code

Item no EAN	4021598114791
Item no GF	35001047013
Item no GTIN	04021598114791

### Dimensions

Item Unit Height	85
Item Unit Length	75
Item Unit Weight	0,929
Item Unit Width	19
Item_UOM	pce

### Measurements

LENGTH_L	75
Length (l1)	46
Length (l2)	20
Wall thickness_s	5,8
z1	9

### Packaging

Packaging GTIN PL1	06414905402137
Packaging GTIN PL4	06414905402144
Packaging Height PL1	102
Packaging Height PL4	548
Packaging Length PL1	154
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00180642

Packaging Volume PL4	0,52608
Packaging Weight PL1	1,179
Packaging Weight PL4	250,19
Packaging Width PL1	115
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)