


## Uponor Radi Pipe natural PN6 16x2,0 120m

1047610

- Operating pressure 6 bar
- Coil

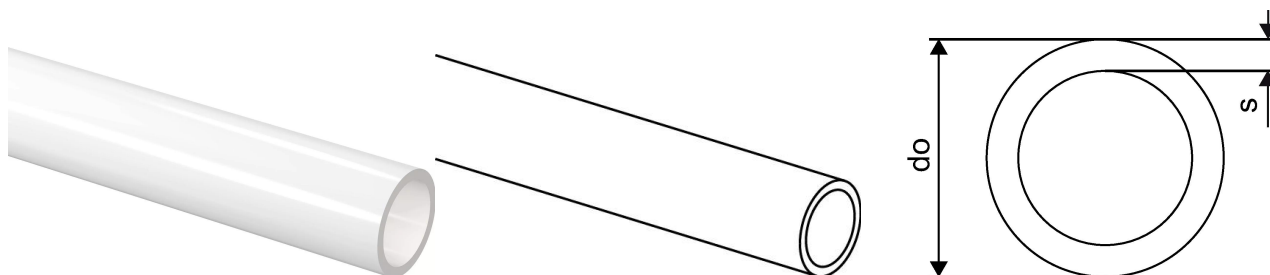

### Application information Uponor Radi Pipe natural PN6

#### Specification



- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 16x2,0 120m

1047610

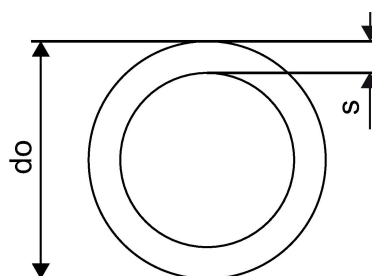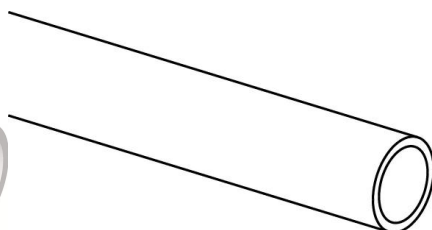

### Product code

Item no EAN	7321500047689
Item no GF	35001047610
Item no GTIN	07321500047689
Item no RSK	2418013

### Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,096
Item Unit Width	16
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905402946
Packaging GTIN PL4	06414905402953
Packaging Height PL1	132
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0803088
Packaging Volume PL4	0,912
Packaging Weight PL1	11,635

Packaging Weight PL4	118,16
Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)