


Uponor RS adapter S-Press 16-RS2

1059397

- Made of tin-plated brass
- Fits to all RS2 base parts.

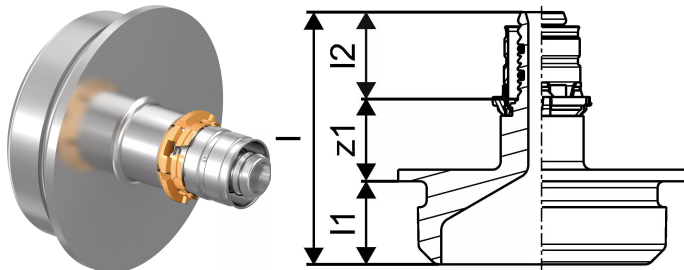

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 16-RS2

1059397

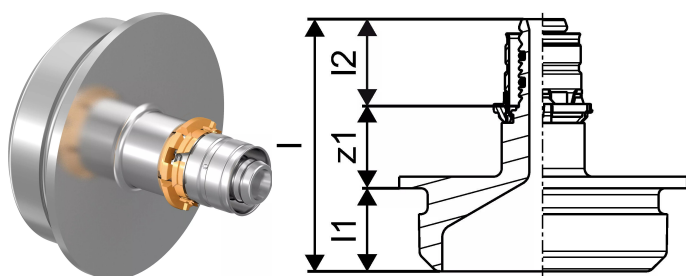

Product code

Item no EAN	4021598121690
Item no GF	35001059397
Item no GTIN	04021598121690
Item no RSK	1897882
Item no VVS	045450016

Dimensions

Item Unit Height	68
Item Unit Length	58
Item Unit Weight	0,353
Item Unit Width	68
Item_UOM	pce

Measurements

LENGTH_L	60,8
Length (l1)	20
Length (l2)	21
z1	19,8

Packaging

Packaging GTIN PL1	06414905463534
Packaging GTIN PL4	06414905495702
Packaging Height PL1	78
Packaging Height PL4	800
Packaging Length PL1	118
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,000901992
Packaging Volume PL4	0,768
Packaging Weight PL1	0,414
Packaging Weight PL4	194,44
Packaging Width PL1	98
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com