


Uponor RS adapter S-Press 16-RS2

1059397

- Made of tin-plated brass
- Fits to all RS2 base parts.

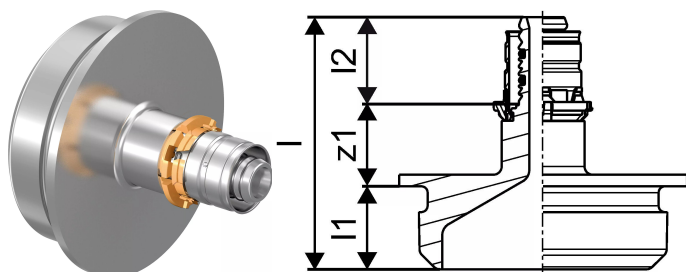

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Leak path test
- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indic

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA
- WRAS
- DVGW
- KIWA

Uponor RS adapter S-Press 16-RS2

1059397

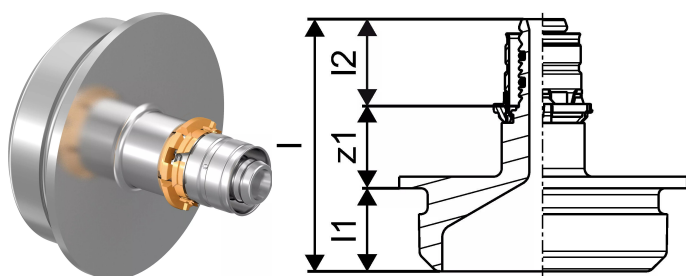

Technical data

Item Quantity 1	1
Item Quantity 2	480
Item (unit of measurement)	pce
Outside diameter	16 mm
Length (l)	61 mm
Length (l1)	20 mm
Length (l2)	21 mm
Z-measurement z1	20 mm

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com