


## Uponor RS adapter S-Press 16-RS2

**1059397**

- Made of tin-plated brass
- Fits to all RS2 base parts.

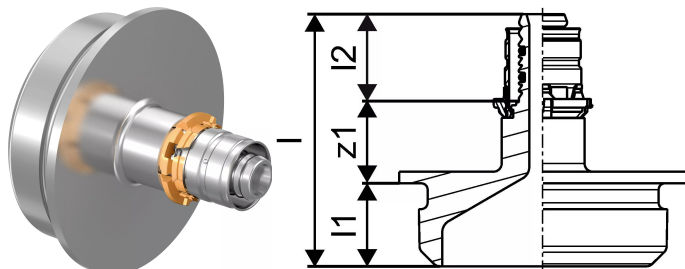

### Application information Uponor RS adapter S-Press

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor RS adapter S-Press 16-RS2

1059397

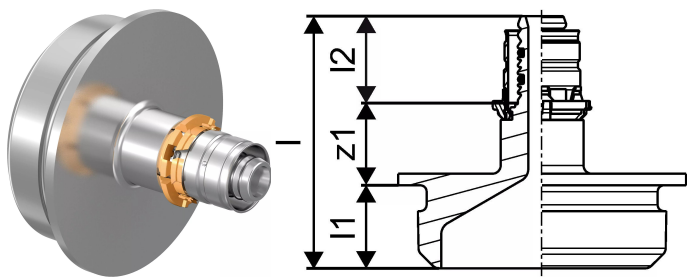

Technical data

Item (unit of measurement)	pce
Item no VVS	045450016
Length (l)	61 mm
Length (l1)	20 mm
Length (l2)	21 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com