


## Uponor RS flange adapter PN6 RS2-DN65 (PN6)

**1059398**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

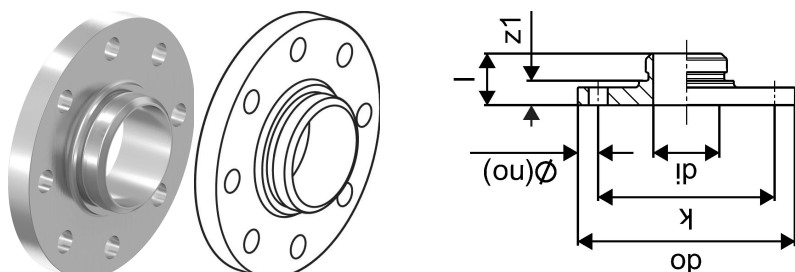

### Application information Uponor RS flange adapter PN6

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS flange adapter PN6 RS2-DN65 (PN6)

1059398

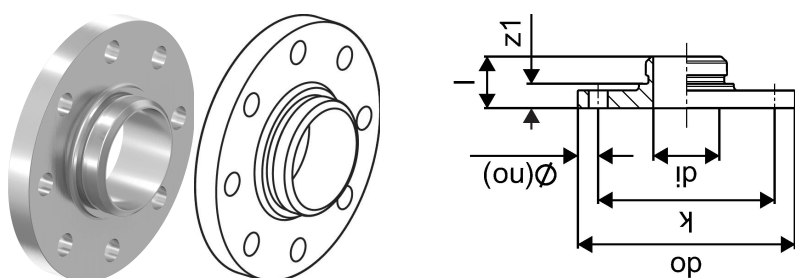

### Measurements

Inner_diameter_di	48,7
LENGTH_L	38
Outer Diameter_do	160
Z Measurement k	130
z1	18

### Product code

Item no EAN	4021598121706
Item no GF	35001059398
Item no GTIN	04021598121706
Item no NRF	5071281
Item no RSK	1897883

### Dimensions

Item Unit Height	40
Item Unit Length	160
Item Unit Weight	1,2
Item Unit Width	160
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905481385
Packaging GTIN PL4	06414905481392
Packaging Height PL1	60
Packaging Height PL4	700
Packaging Length PL1	215
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	144
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,002838
Packaging Volume PL4	0,672
Packaging Weight PL1	1,4
Packaging Weight PL4	197,8
Packaging Width PL1	220
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com