


Uponor RS flange adapter RS2-DN65 (PN16)

1059399

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

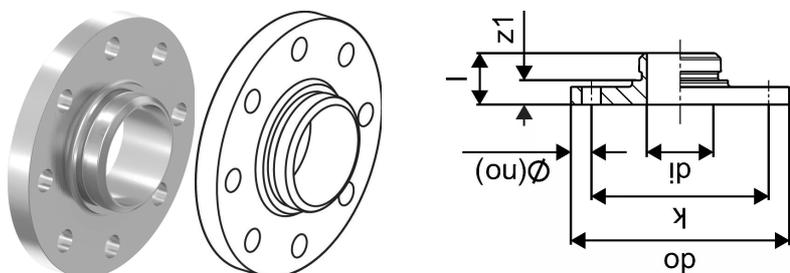

Application information Uponor RS flange adapter

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS flange adapter RS2-DN65 (PN16)

1059399

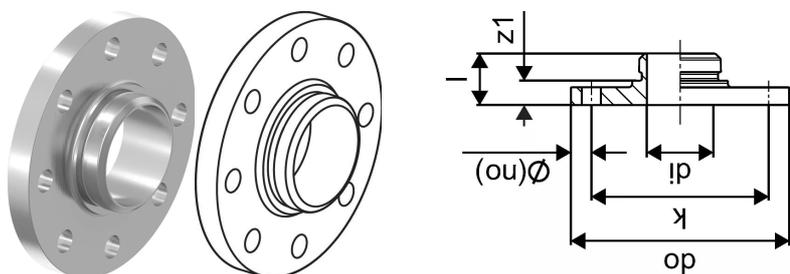

Measurements

Inner_diameter_di	48,7
LENGTH_L	45
Outer Diameter_do	185
Z Measurement k	145
z1	25

Product code

Item no EAN	4021598121713
Item no GF	35001059399
Item no GTIN	04021598121713
Item no NRF	5071282
Item no RSK	1897884
Item no VVS	045458065

Dimensions

Item Unit Height	46
Item Unit Length	190
Item Unit Weight	4,25
Item Unit Width	190
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481460
Packaging GTIN PL4	06414905481477
Packaging Height PL1	58
Packaging Height PL4	700
Packaging Length PL1	220
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	90

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0026796
Packaging Volume PL4	0,672
Packaging Weight PL1	4,35
Packaging Weight PL4	407,5
Packaging Width PL1	210
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com