


## Uponor RS adapter male thread R1 1/2"MT-RS2

**1059402**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

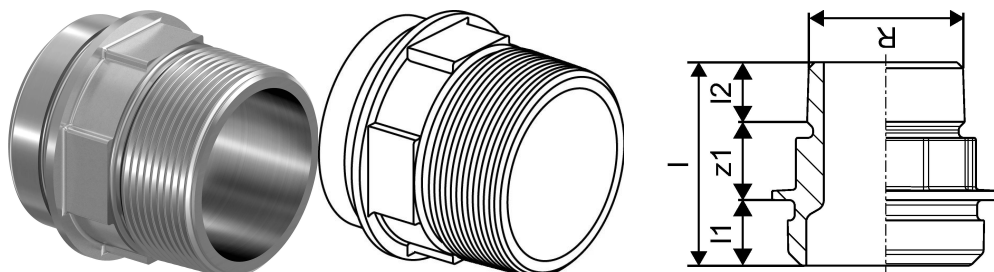

### Application information Uponor RS adapter male thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

Uponor RS adapter male thread R1 1/2"MT-RS2  
1059402

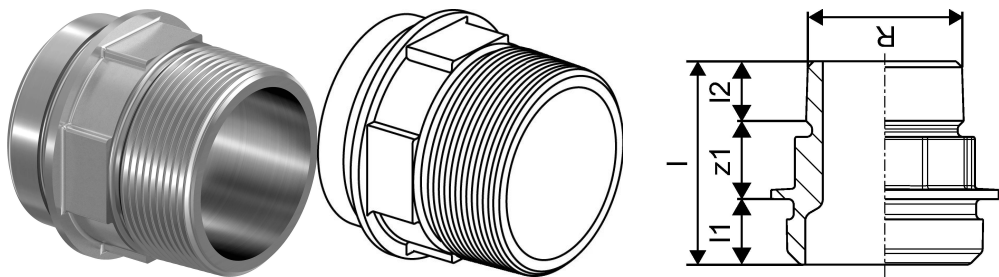

Technical data

|                            |           |
|----------------------------|-----------|
| Item (unit of measurement) | pce       |
| Item no VVS                | 045451111 |
| Length (l)                 | 62 mm     |
| Length (l1)                | 20 mm     |
| Length (l2)                | 24 mm     |
| Packaging Quantity PL1     | 1         |
| Packaging Quantity PL4     | 480       |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com