


## Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

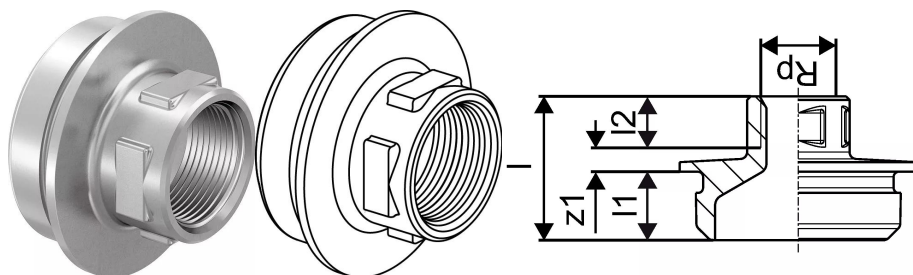

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

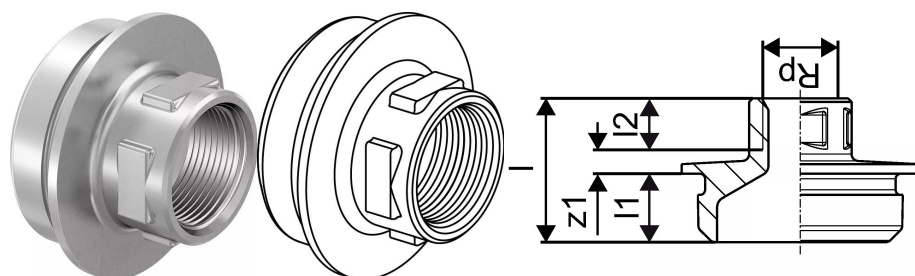

### Measurements

Female thread Rp	0,5
LENGTH_L	42
Length (l1)	20
Length (l2)	15
z1	7

### Product code

Item no EAN	4021598121751
Item no GF	35001059403
Item no GTIN	04021598121751
Item no RSK	1897888
Item no VVS	045452163

### Dimensions

Item Unit Height	45
Item Unit Length	65
Item Unit Weight	0,346
Item Unit Width	65
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905463596
Packaging GTIN PL4	06414905495764
Packaging Height PL1	80
Packaging Height PL4	700
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,672
Packaging Weight PL1	0,401
Packaging Weight PL4	191,08
Packaging Width PL1	100
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com