


## Uponor RS adapter female thread Rp1/2"FT-RS3

**1059404**

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

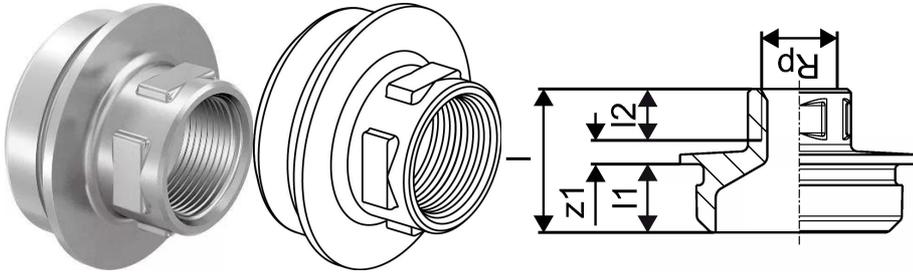

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter female thread Rp1/2"FT-RS3

1059404

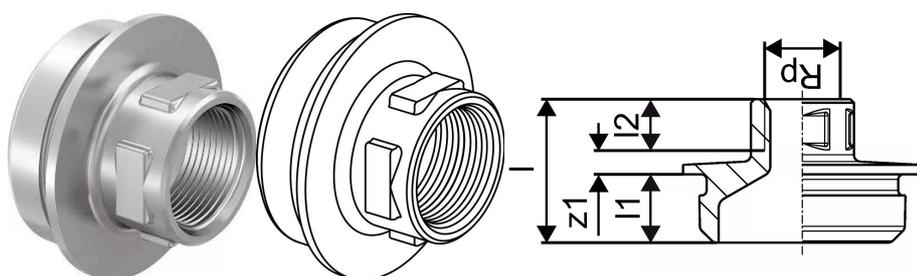

### Measurements

Female thread Rp	0,5
LENGTH_L	43
Length (l1)	20
Length (l2)	15
z1	8

### Product code

Item no EAN	4021598121768
Item no GF	35001059404
Item no GTIN	04021598121768
Item no RSK	1897889
Item no VVS	045452164

### Dimensions

Item Unit Height	100
Item Unit Length	55
Item Unit Weight	0,662
Item Unit Width	100
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905463602
Packaging GTIN PL4	06414905495771
Packaging Height PL1	71
Packaging Height PL4	700
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00137385
Packaging Volume PL4	0,672
Packaging Weight PL1	0,734
Packaging Weight PL4	247,432
Packaging Width PL1	129
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)