


Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

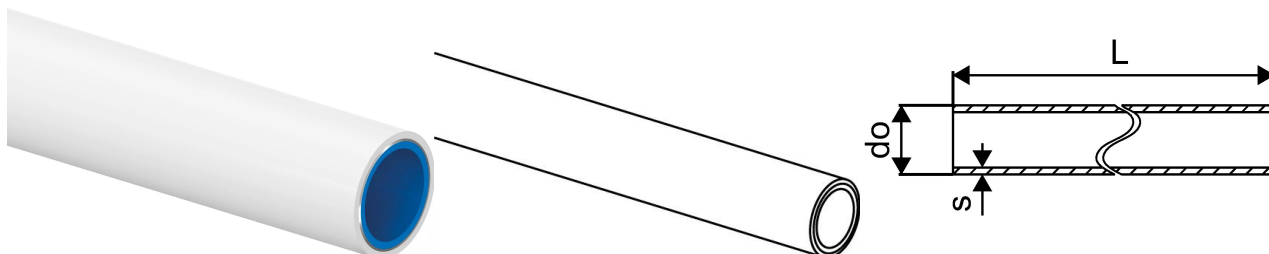

Application information Uponor Uni Pipe PLUS white S

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

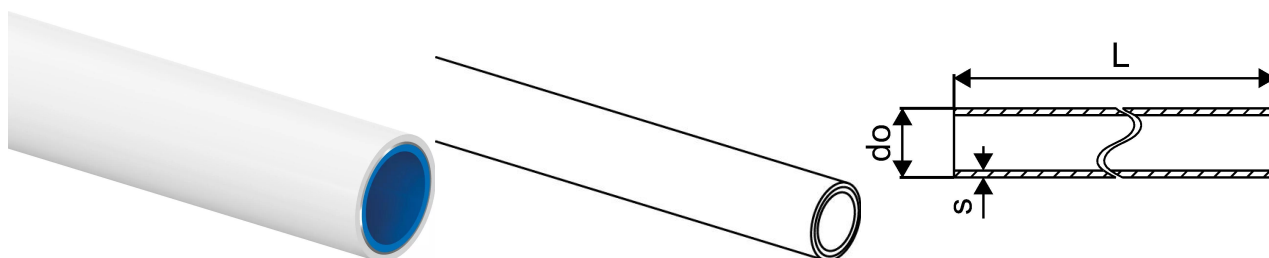

Technical data

Item (unit of measurement) m

Item no VVS 087480125

Item no LVI 1720135

Item no NRF 5072099

Packaging Quantity PL1 5

Packaging Quantity PL2 50

Packaging Quantity PL4 2550

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
FinlandT +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com