
Product data sheet



GF Uponor Uni Pipe PLUS white 20x2,25 100m

1059579

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

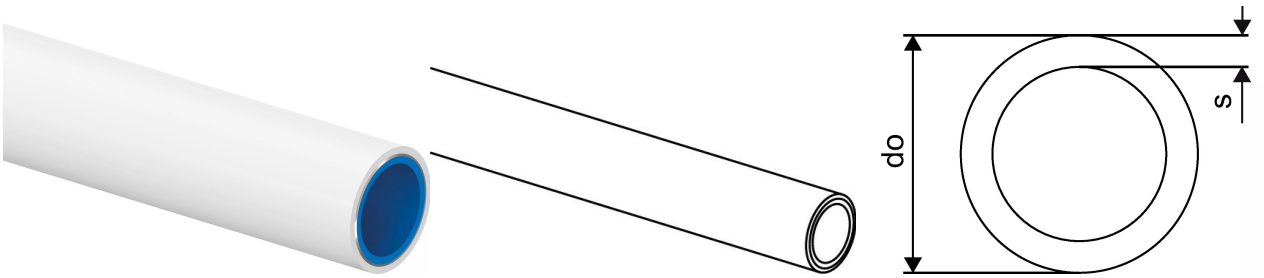

Application information GF Uponor Uni Pipe PLUS white

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white 20x2,25 100m

1059579

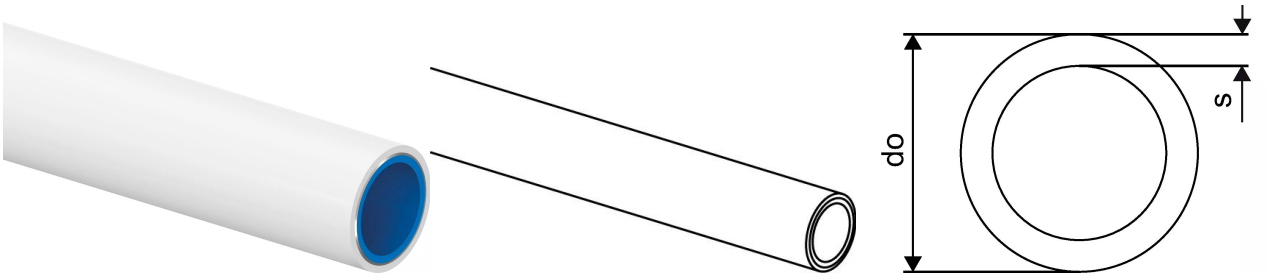

Product code

Item no EAN	4021598121270
Item no GF	35001059579
Item no GTIN	04021598121270
Item no LVI	1720140
Item no NOBB	48167257
Item no NRF	5072092
Item no RSK	2004923
Item no VVS	087480520

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	20
Item_UOM	m

Measurements

Length	100
Outer Diameter_do	20
Wall thickness_s	2,25

Packaging

Packaging GTIN PL1	06414905412143
Packaging GTIN PL4	06414905412150
Packaging Height PL1	195
Packaging Height PL4	2000
Packaging Length PL1	800
Packaging Length PL4	1200

Packaging Quantity PL1	100
Packaging Quantity PL4	1300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,12324
Packaging Volume PL4	1,92
Packaging Weight PL1	18,144
Packaging Weight PL4	260,872
Packaging Width PL1	790
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+