
Product data sheet



GF Uponor Uni Pipe PLUS white 25x2,5 50m

1059581

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

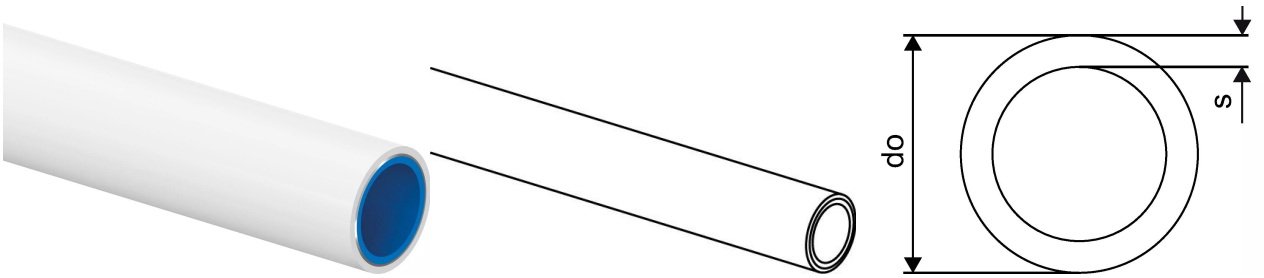

Application information GF Uponor Uni Pipe PLUS white

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white 25x2,5 50m

1059581

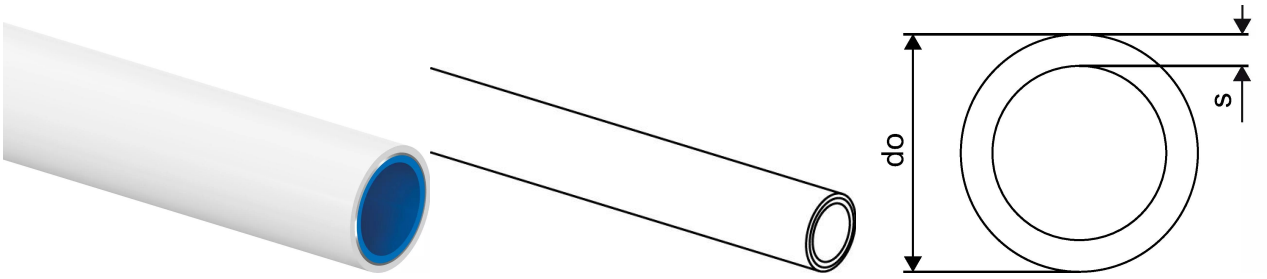

Product code

Item no EAN	4021598121294
Item no GF	35001059581
Item no GTIN	04021598121294
Item no LVI	1720142
Item no NOBB	48167276
Item no NRF	5072094
Item no RSK	2004925
Item no VVS	087480325

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,244
Item Unit Width	25
Item_UOM	m

Measurements

Length	50
Outer Diameter_do	25
Wall thickness_s	2,5

Packaging

Packaging GTIN PL1	06414905412167
Packaging GTIN PL4	06414905412174
Packaging Height PL1	130
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140

Packaging Quantity PL1	50
Packaging Quantity PL4	700
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,168948
Packaging Volume PL4	2,5992
Packaging Weight PL1	14,316
Packaging Weight PL4	210,424
Packaging Width PL1	1140
Packaging Width PL4	1140

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+