


Uponor Ecoflex coupling insulation set 200/175/140

1060984

- Straight set for connecting the casing pipe
- ABS half sheels with insulation and reducer
- Traffic load of 60 tons (for dimension 250 : 40 tons)

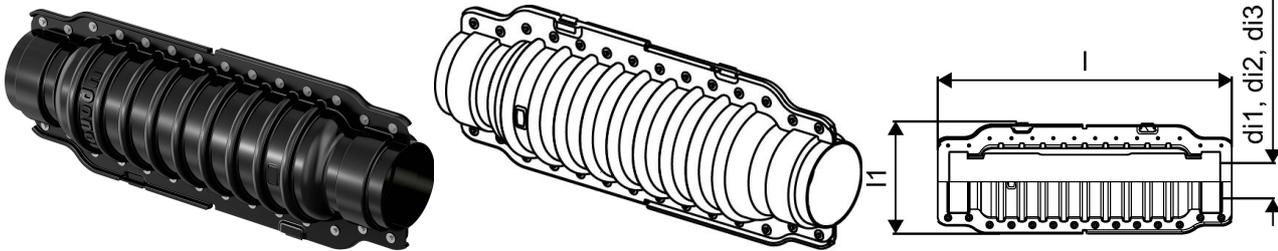

Application information Uponor Ecoflex coupling insulation set

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex coupling insulation set 200/175/140

1060984

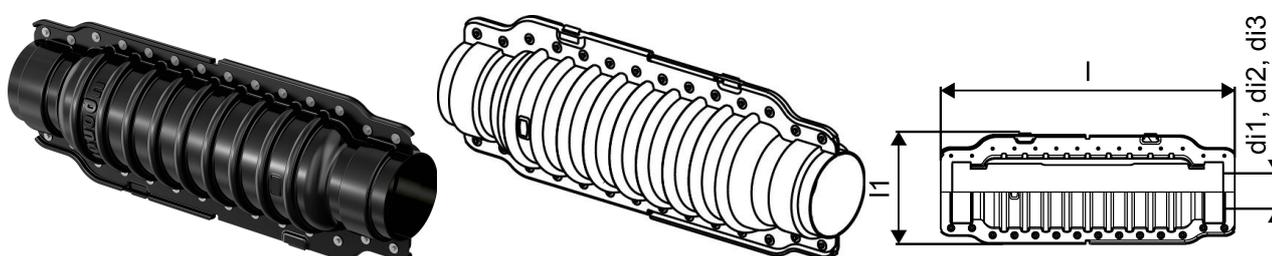

Measurements

Inner_diameter_di1	200
Inner_diameter_di2	175
Inner_diameter_di3	140
LENGTH_L	1125
Length (l1)	426

Product code

Item no EAN	6414905202676
Item no GF	35001060984
Item no GTIN	06414905202676
Item no LVI	3010401
Item no NOBB	47288776
Item no NRF	8360831
Item no RSK	2190471
Item no VVS	087900200

Dimensions

Item Unit Height	325
Item Unit Length	1015
Item Unit Weight	9,6
Item Unit Width	400
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905464104
Packaging GTIN PL4	06414905495900
Packaging Height PL1	330
Packaging Height PL4	960
Packaging Length PL1	1020
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	6
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1669536
Packaging Volume PL4	0,9216
Packaging Weight PL1	9,8
Packaging Weight PL4	62
Packaging Width PL1	496
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com