


## Uponor Comfort Pipe PLUS 16x2,0 120m

1062044

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

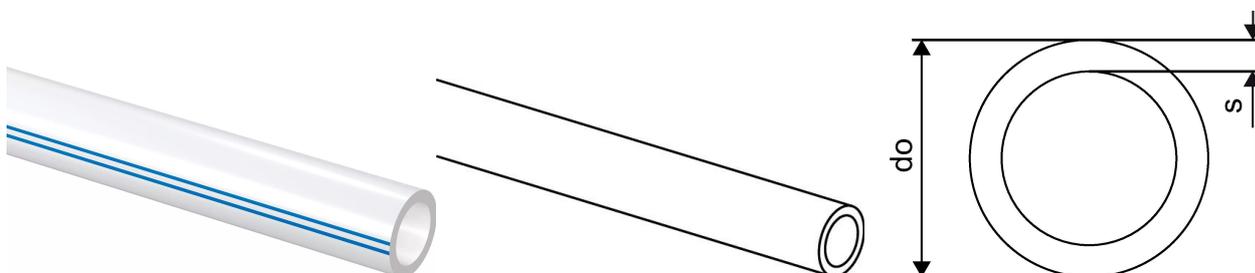

### Application information Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 16x2,0 120m

1062044

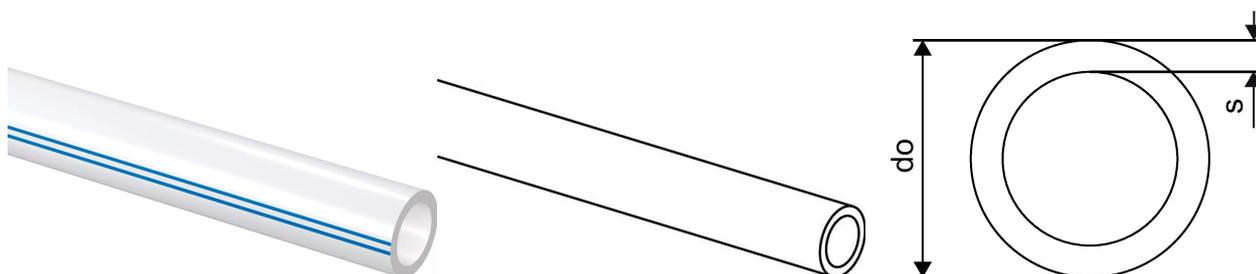

### Product code

Item no EAN	7321500056148
Item no GF	35001062044
Item no GTIN	07321500056148
Item no LVI	2022243
Item no RSK	2523236
Item no VVS	087217164

### Dimensions

Item Unit Height	15
Item Unit Length	1000
Item Unit Weight	0,091
Item Unit Width	15
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905412808
Packaging GTIN PL4	06414905412815
Packaging Height PL1	120
Packaging Height PL4	800
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	1080
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,07488

Packaging Volume PL4	0,768
Packaging Weight PL1	11,98
Packaging Weight PL4	107,82
Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)