


## Uponor Comfort Pipe PLUS 16x2,0 240m

### 1062045

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

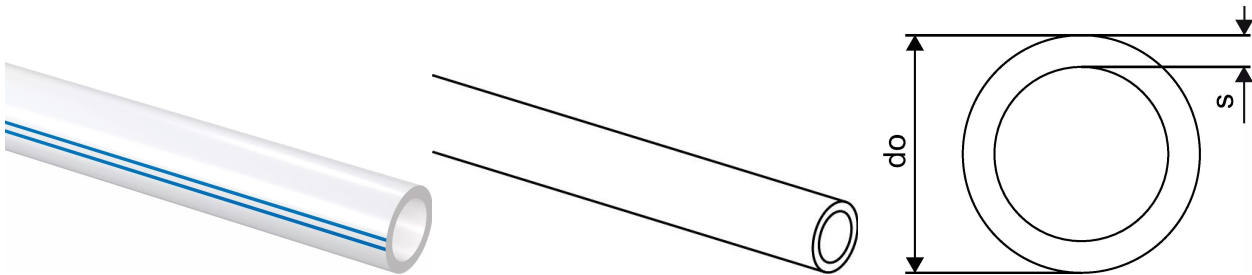

## Application information Uponor Comfort Pipe PLUS

### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 16x2,0 240m

1062045



### Product code

Item no EAN	7321500056155
Item no GF	35001062045
Item no GTIN	07321500056155
Item no LVI	2022244
Item no NRF	8361262
Item no RSK	2523237
Item no VVS	087217165

### Dimensions

Item Unit Height	15
Item Unit Length	1000
Item Unit Weight	0,091
Item Unit Width	15
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905412822
Packaging GTIN PL4	06414905412839
Packaging Height PL1	200
Packaging Height PL4	800
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	240
Packaging Quantity PL4	1440
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,1256
Packaging Volume PL4	0,768
Packaging Weight PL1	22,11
Packaging Weight PL4	132,66
Packaging Width PL1	785
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com