


## Uponor Comfort Pipe PLUS 16x2,0 640m

1062046

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

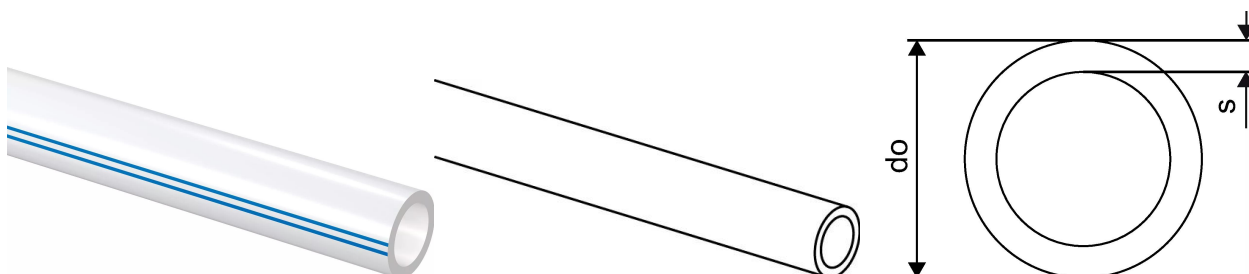

### Application information Uponor Comfort Pipe PLUS

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 16x2,0 640m

1062046



### Product code

Item no EAN	7321500056162
Item no GF	35001062046
Item no GTIN	07321500056162
Item no LVI	2022245
Item no NRF	8361263
Item no RSK	2523238
Item no VVS	087217167

### Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,091
Item Unit Width	16
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905412846
Packaging GTIN PL4	06414905412853
Packaging Height PL1	808
Packaging Height PL4	952
Packaging Length PL1	794
Packaging Length PL4	1200
Packaging Quantity PL1	640
Packaging Quantity PL4	1280
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,381081888
Packaging Volume PL4	0,91392
Packaging Weight PL1	62,8
Packaging Weight PL4	150,5
Packaging Width PL1	594
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com