
# Product data sheet



# GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

## 1062181

- Insulation thickness 10 mm
- thermal conductivity λ=0,035 W/m*k
- round extruded

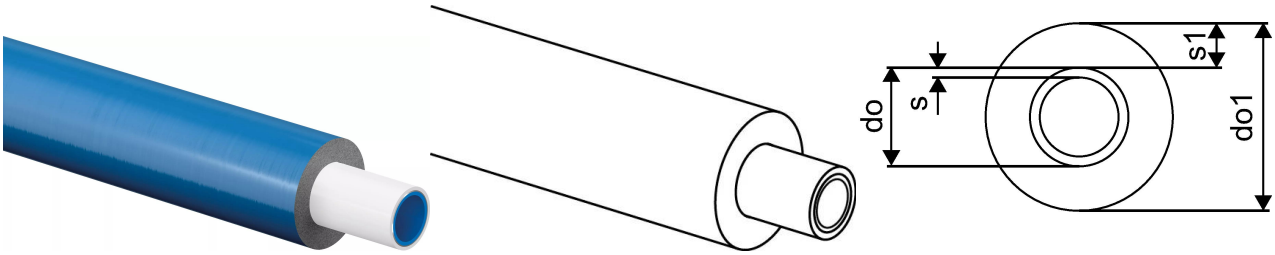


## Application information GF Uponor Uni Pipe PLUS white insulated S10 WLS 035

### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

### Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

# GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

## 1062181

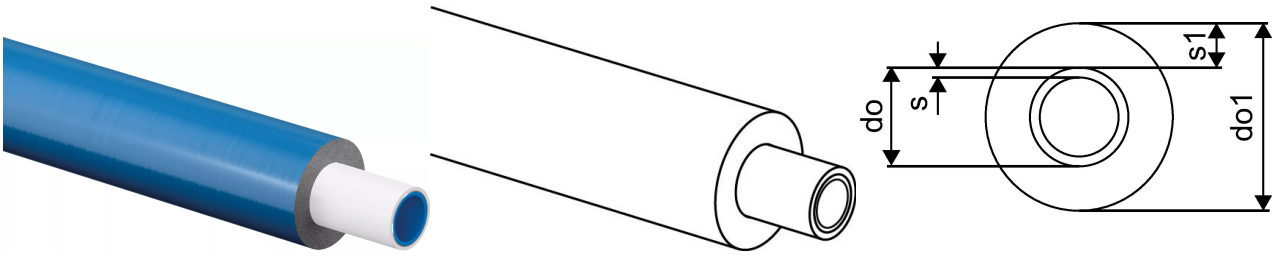


### Product code

| | |
|---|---|
| Item no EAN | 4021598123526 |
| Item no GF | 35001062181 |
| Item no GTIN | 04021598123526 |
| Item no LVI | 1720149 |
| Item no NRF | 5071201 |
| Item no RSK | 2004929 |
| Item no VVS | 087481416 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 36 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,143 |
| Item Unit Width | 36 |
| Item_UOM | m |

### Measurements

| | |
|---|---|
| Outer Diameter_do | 16 |
| Outer Diameter_do1 | 36 |
| Wall thickness_s | 2 |
| Wall thickness_s1 | 10 |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905412860 |
| Packaging GTIN PL4 | 06414905412877 |
| Packaging Height PL1 | 787 |
| Packaging Height PL4 | 1718 |
| Packaging Length PL1 | 779 |
| Packaging Length PL4 | 1200 |

| | |
|---|---|
| Packaging Quantity PL1 | 75 |
| Packaging Quantity PL4 | 450 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,238485397 |
| Packaging Volume PL4 | 1,64928 |
| Packaging Weight PL1 | 13,15 |
| Packaging Weight PL4 | 103,9 |
| Packaging Width PL1 | 389 |
| Packaging Width PL4 | 800 |

## Documents

Page with all documents

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**



**Uponor Corporation**

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+