


Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

1062181

- Insulation thickness 10 mm
- thermal conductivity $\lambda=0,035 \text{ W/m}^{\circ}\text{k}$
- round extruded

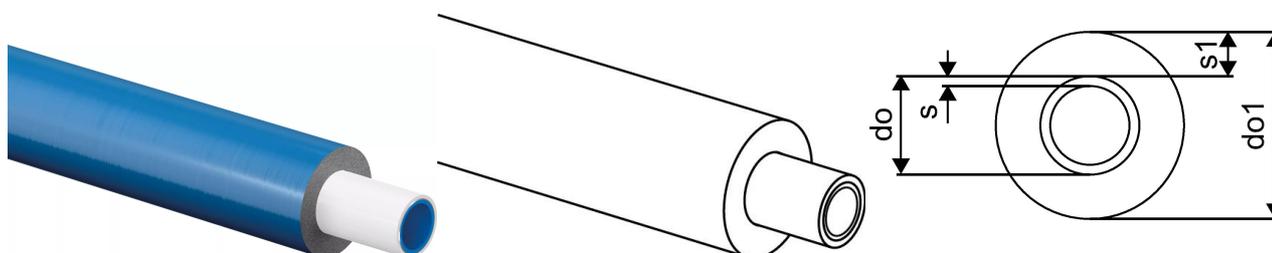

Application information Uponor Uni Pipe PLUS white insulated S10 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

1062181

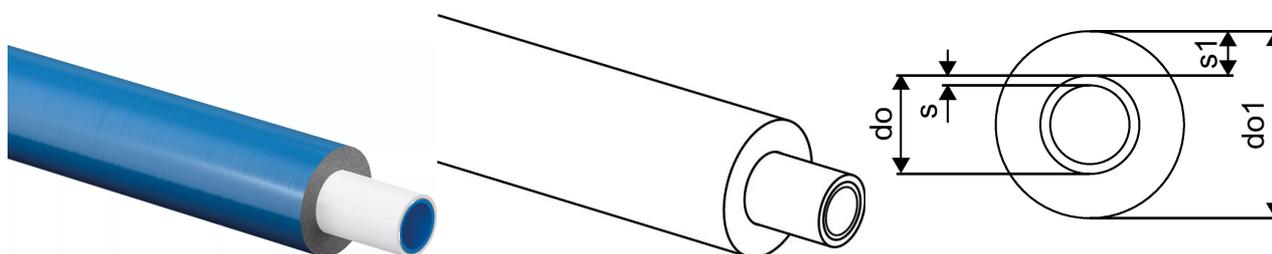

Product code

Item no EAN	4021598123526
Item no GF	35001062181
Item no GTIN	04021598123526
Item no LVI	1720149
Item no NRF	5071201
Item no RSK	2004929
Item no VVS	087481416

Dimensions

Item Unit Height	36
Item Unit Length	1000
Item Unit Weight	0,143
Item Unit Width	36
Item_UOM	m

Measurements

Outer Diameter_do	16
Outer Diameter_do1	36
Wall thickness_s	2
Wall thickness_s1	10

Packaging

Packaging GTIN PL1	06414905412860
Packaging GTIN PL4	06414905412877
Packaging Height PL1	787
Packaging Height PL4	1718
Packaging Length PL1	779
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	450

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,238485397
Packaging Volume PL4	1,64928
Packaging Weight PL1	13,15
Packaging Weight PL4	103,9
Packaging Width PL1	389
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com