
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 20x2,25 blue 75m

1062182

- Insulation thickness 10 mm
- thermal conductivity λ=0,035 W/m*k
- round extruded

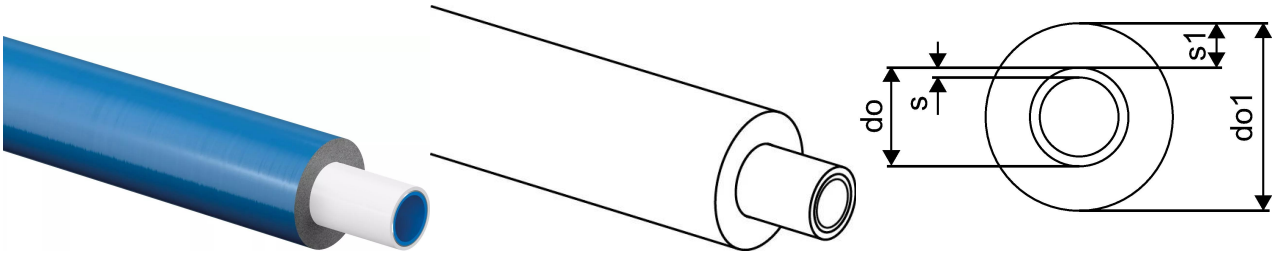

Application information GF Uponor Uni Pipe PLUS white insulated S10 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 20x2,25 blue 75m

1062182

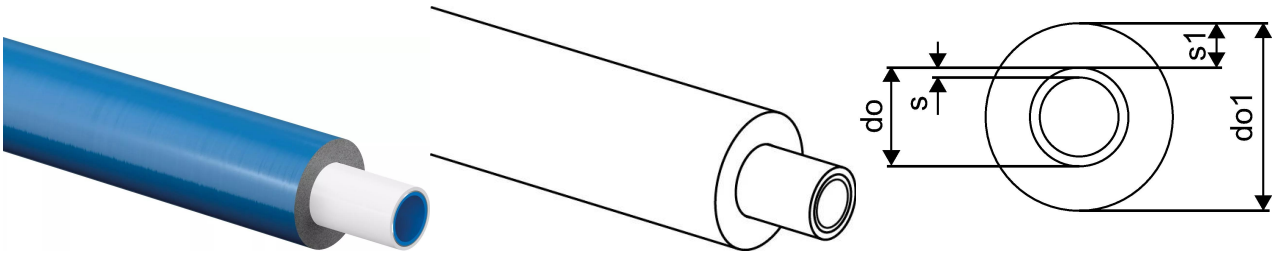

Product code

Item no EAN	4021598123533
Item no GF	35001062182
Item no GTIN	04021598123533
Item no LVI	1720150
Item no NRF	5071202
Item no RSK	2004930
Item no VVS	087481420

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,197
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	20
Outer Diameter_do1	40
Wall thickness_s	2,25
Wall thickness_s1	10

Packaging

Packaging GTIN PL1	06414905412884
Packaging GTIN PL4	06414905412891
Packaging Height PL1	1140
Packaging Height PL4	1936
Packaging Length PL1	1140
Packaging Length PL4	1140

Packaging Quantity PL1	75
Packaging Quantity PL4	525
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3326976
Packaging Volume PL4	2,5160256
Packaging Weight PL1	19,01
Packaging Weight PL4	158,10
Packaging Width PL1	256
Packaging Width PL4	1140

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+