


Uponor Comfort Pipe PLUS 14x2,0 240m

1062884

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

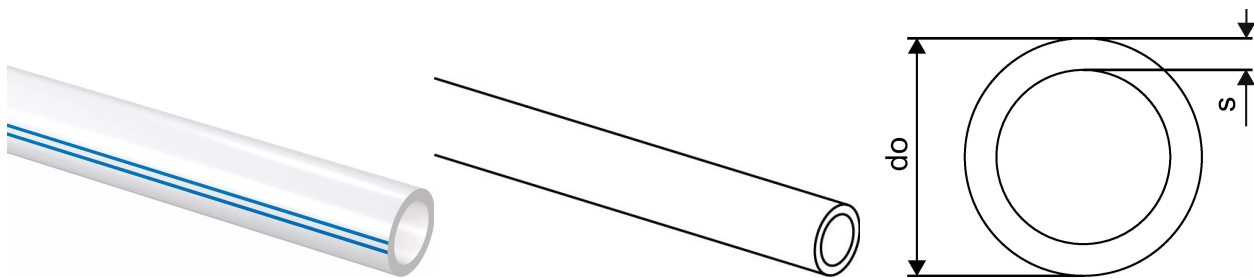

Application information Uponor Comfort Pipe PLUS

Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

Uponor Comfort Pipe PLUS 14x2,0 240m

1062884



Product code

Item no EAN	7321500056513
Item no GF	35001062884
Item no GTIN	07321500056513
Item no NRF	8361282

Dimensions

Item Unit Height	14
Item Unit Length	1000
Item Unit Weight	0,078
Item Unit Width	14
Item_UOM	m

Measurements

Outer Diameter_do	14
Wall thickness_s	2

Packaging

Packaging GTIN PL1	06414905413096
Packaging GTIN PL4	06414905413102
Packaging Height PL1	170
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	240
Packaging Quantity PL4	1680
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,103428
Packaging Volume PL4	0,912
Packaging Weight PL1	20,2

Packaging Weight PL4	142,8
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com