


## Uponor Comfort Pipe PLUS 14x2,0 960m

1062885

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

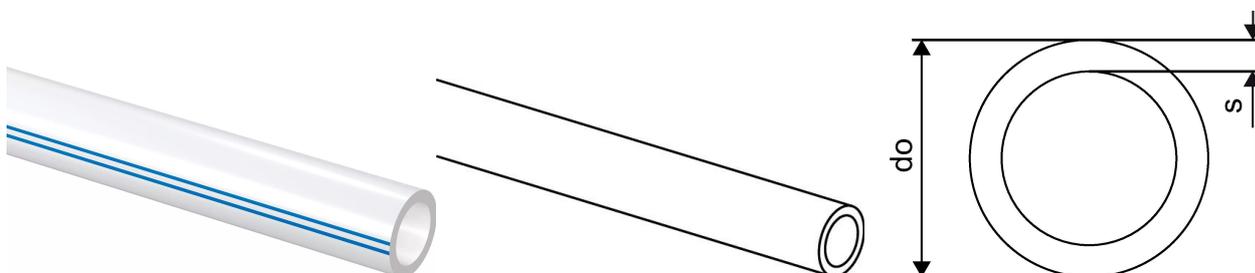

### Application information Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 14x2,0 960m

1062885

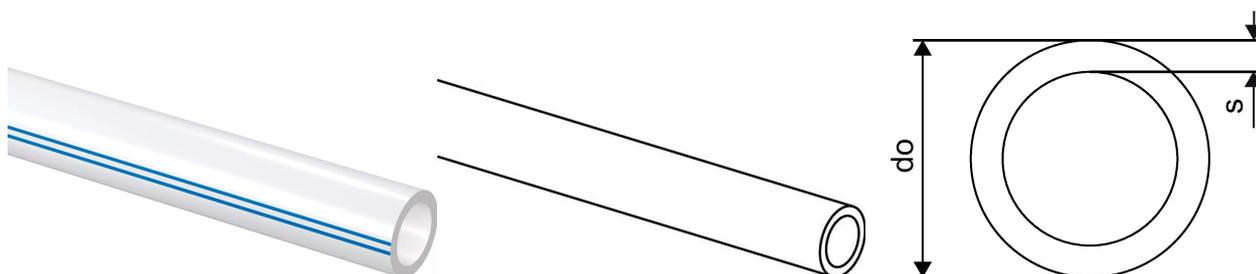

### Product code

Item no EAN	7321500056520
Item no GF	35001062885
Item no GTIN	07321500056520

### Dimensions

Item Unit Height	14
Item Unit Length	1000
Item Unit Weight	0,078
Item Unit Width	14
Item_UOM	m

### Measurements

Outer Diameter_do	14
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905413119
Packaging GTIN PL4	06414905413126
Packaging Height PL1	400
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	960
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,24336
Packaging Volume PL4	0,912
Packaging Weight PL1	78,82
Packaging Weight PL4	184,014

Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)