


## Uponor Ecoflex Varia Single 125x11,4/200

1062886

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

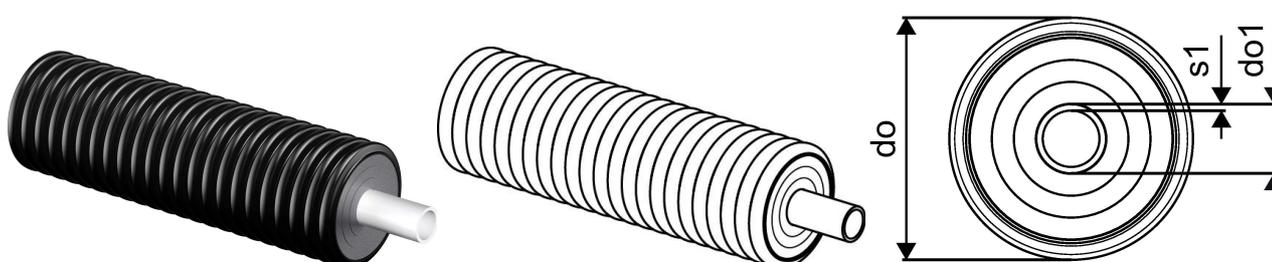

### Application information Uponor Ecoflex Varia Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Varia Single 125x11,4/200

1062886

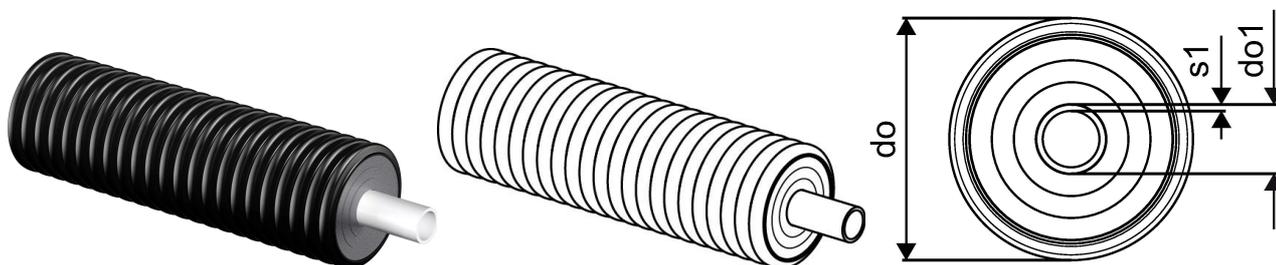

### Measurements

Bending radius M	1,3
Outer Diameter_do	200
Outer Diameter_do1	125
Wall thickness_s1	11,4

### Product code

Item no EAN	4021598130227
Item no GF	35001062886
Item no GTIN	04021598130227
Item no VVS	087807525

### Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	5,75
Item Unit Width	200
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905464708
Packaging Height PL1	2050
Packaging Length PL1	2200
Packaging Quantity PL1	120
Packaging Type PL1	Coil
Packaging Volume PL1	7,216
Packaging Weight PL1	690
Packaging Width PL1	1600

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)