


## Uponor Comfort Pipe PLUS 25x2,3 220m

1062888

- 6 bar at 90°C
- Application class 4 and 5

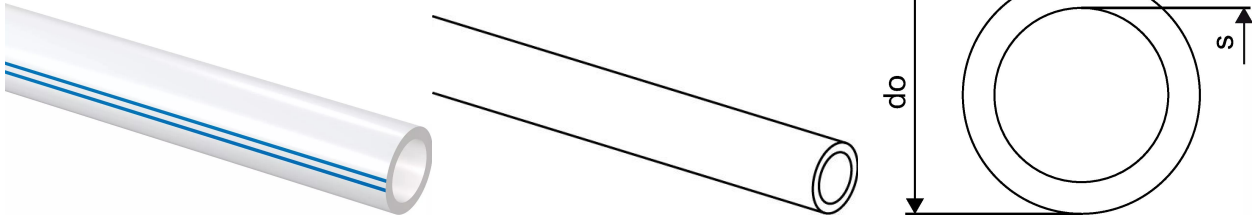

### Application information Uponor Comfort Pipe PLUS

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 25x2,3 220m

1062888



### Product code

Item no EAN	7321500056544
Item no GF	35001062888
Item no GTIN	07321500056544
Item no LVI	2022044
Item no VVS	087225124

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905413157
Packaging GTIN PL4	06414905413164
Packaging Height PL1	600
Packaging Height PL4	950
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	220
Packaging Quantity PL4	440
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,384
Packaging Volume PL4	0,912

Packaging Weight PL1	37,06
Packaging Weight PL4	104,5
Packaging Width PL1	800
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com