


## Uponor Comfort Pipe PLUS 25x2,3 300m

1062889

- 6 bar at 90°C
- Application class 4 and 5

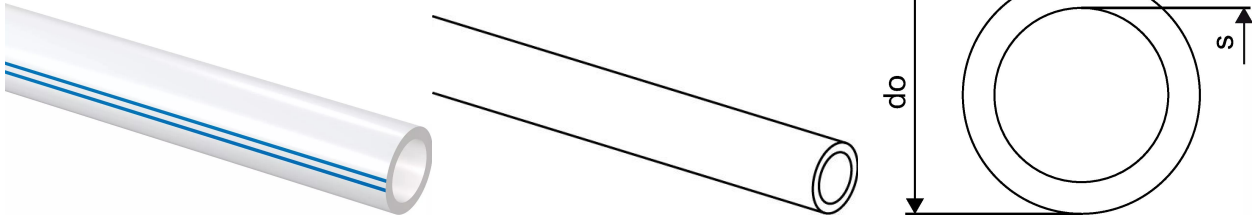

### Application information Uponor Comfort Pipe PLUS

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 25x2,3 300m

1062889



### Product code

Item no EAN	7321500056551
Item no GF	35001062889
Item no GTIN	07321500056551
Item no LVI	2022045
Item no RSK	2419795
Item no VVS	087225130

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905413171
Packaging GTIN PL4	06414905413188
Packaging Height PL1	590
Packaging Height PL4	950
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	300
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3776

Packaging Volume PL4	0,912
Packaging Weight PL1	54,8
Packaging Weight PL4	109,6
Packaging Width PL1	800
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com