
Product data sheet



GF Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 red 75m

1063062

- coil
- pipe in conduit

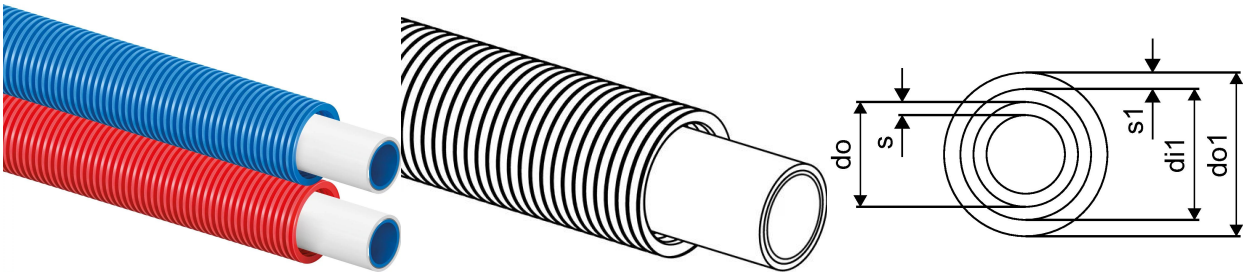

Application information GF Uponor Uni Pipe PLUS white in conduit

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 red 75m

1063062

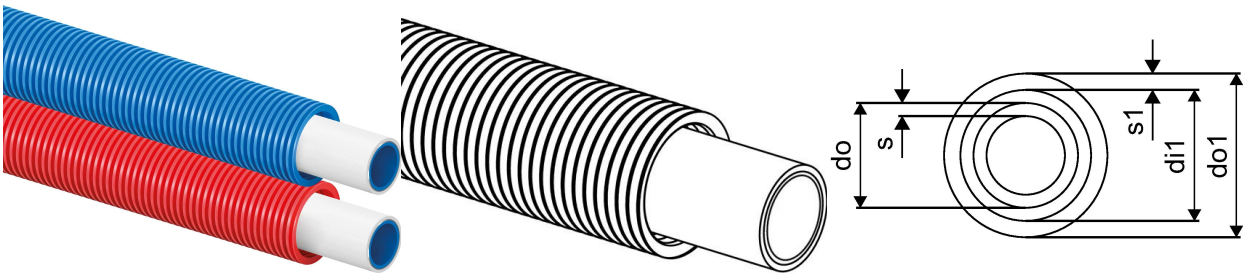

Measurements

Inner_diameter_di1	23
Outer Diameter_do	20
Outer Diameter_do1	28
Wall thickness_s	2,3
Wall thickness_s1	2,5

Product code

Item no EAN	4021598123014
Item no GF	35001063062
Item no GTIN	04021598123014
Item no VVS	087482320

Dimensions

Item Unit Height	28
Item Unit Length	1000
Item Unit Weight	0,251
Item Unit Width	28
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905413256
Packaging GTIN PL4	06414905413263
Packaging Height PL1	195
Packaging Height PL4	2000
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	900

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,12324
Packaging Volume PL4	1,92
Packaging Weight PL1	19,013
Packaging Weight PL4	250,9
Packaging Width PL1	790
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+