
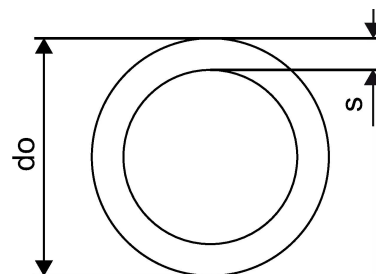


Uponor Comfort Pipe Minitec 9,9x1,1 120m

1063288

- Material: PE-Xa

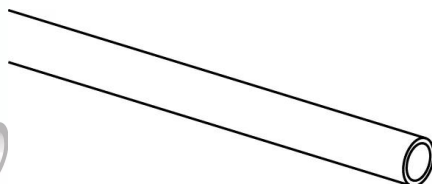

Application information Uponor Comfort Pipe Minitec

Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Manufactured according to EN ISO 15875
- EVOH oxygen diffusion barrier according to DIN 4726
- Application class 4 for underfloor heating and low-temperature radiators
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Natural pipe color
- Available in multiple diameters and coil lengths
- Minitec variant available with 9.9 mm diameter for low-build systems

Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds

Uponor Comfort Pipe Minitec 9,9x1,1 120m

1063288



Product code

Item no EAN	7321500056674
Item no GF	35001063288
Item no GTIN	07321500056674
Item no LVI	2012143
Item no NOBB	47417924
Item no NRF	8361031
Item no RSK	2419974
Item no VVS	087230070

Dimensions

Item Unit Height	10
Item Unit Length	1000
Item Unit Weight	0,038
Item Unit Width	10
Item_UOM	m

Measurements

Outer Diameter_do	9,9
Wall thickness_s	1,1

Packaging

Packaging GTIN PL1	06414905413355
Packaging GTIN PL4	06414905413362
Packaging Height PL1	67
Packaging Height PL4	810
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	1680
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,0407628
Packaging Volume PL4	0,7776
Packaging Weight PL1	5,27
Packaging Weight PL4	91,52
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com