
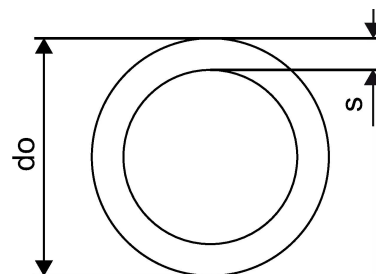


## Uponor Comfort Pipe Minitec 9,9x1,1 480m

1063381

- Material: PE-Xa

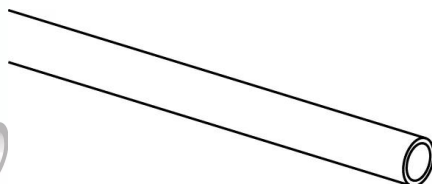

### Application information Uponor Comfort Pipe Minitec

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Manufactured according to EN ISO 15875
- EVOH oxygen diffusion barrier according to DIN 4726
- Application class 4 for underfloor heating and low-temperature radiators
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Natural pipe color
- Available in multiple diameters and coil lengths
- Minitec variant available with 9.9 mm diameter for low-build systems

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds

## Uponor Comfort Pipe Minitec 9,9x1,1 480m

1063381



### Product code

Item no EAN	7321500056698
Item no GF	35001063381
Item no GTIN	07321500056698
Item no LVI	2012145
Item no VVS	087230078

### Dimensions

Item Unit Height	10
Item Unit Length	1000
Item Unit Weight	0,038
Item Unit Width	10
Item_UOM	m

### Measurements

Outer Diameter_do	9,9
Wall thickness_s	1,1

### Packaging

Packaging GTIN PL1	06414905413393
Packaging GTIN PL4	06414905413409
Packaging Height PL1	200
Packaging Height PL4	800
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	480
Packaging Quantity PL4	2880
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1256
Packaging Volume PL4	0,768

Packaging Weight PL1	19,62
Packaging Weight PL4	138,32
Packaging Width PL1	785
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com