
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S4 WLS 040 20x2,25 blue 100m

1063555

- coil
-Insulation thickness 4 mm
- thermal conductivity λ=0,040 W/m*k
- round extruded

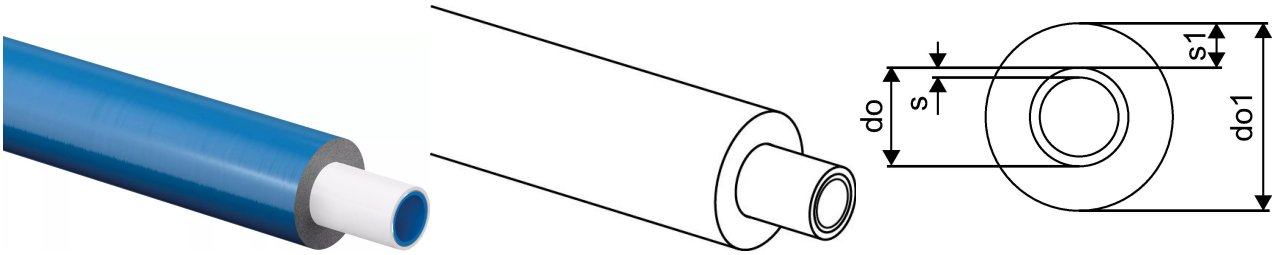

Application information GF Uponor Uni Pipe PLUS white insulated S4 WLS 040

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white insulated S4 WLS 040 20x2,25 blue 100m

1063555

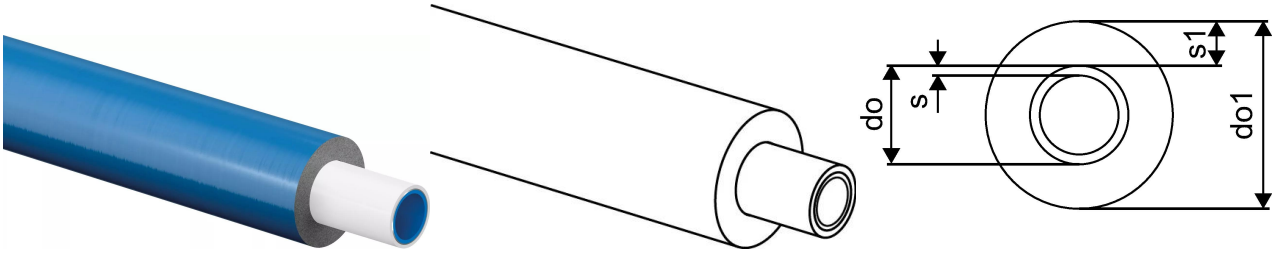

Product code

Item no EAN	4021598124455
Item no GF	35001063555
Item no GTIN	04021598124455

Dimensions

Item Unit Height	28
Item Unit Length	1000
Item Unit Weight	0,19
Item Unit Width	28
Item_UOM	m

Measurements

Outer Diameter_do	20
Outer Diameter_do1	28
Wall thickness_s	2,25
Wall thickness_s1	4

Packaging

Packaging GTIN PL1	06414905413447
Packaging GTIN PL4	06414905413454
Packaging Height PL1	295
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	800
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,179478
Packaging Volume PL4	1,92
Packaging Weight PL1	19,19
Packaging Weight PL4	177
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+