
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

- coil
- Insulation thickness 6 mm
- thermal conductivity λ=0,035 W/m*k
- round extruded

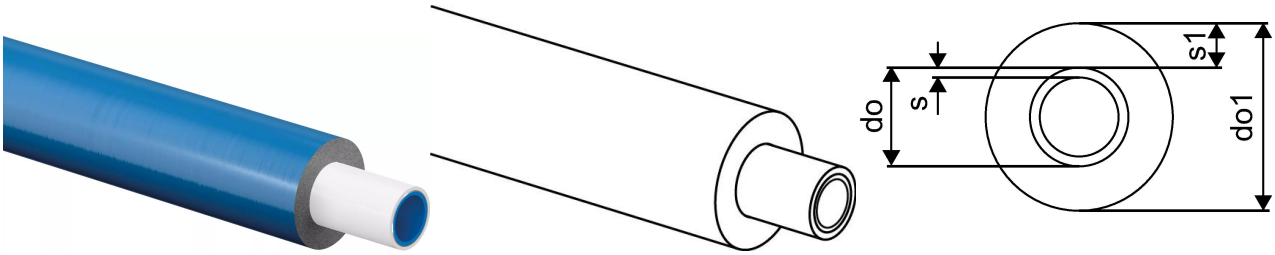

Application information GF Uponor Uni Pipe PLUS white insulated S6 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

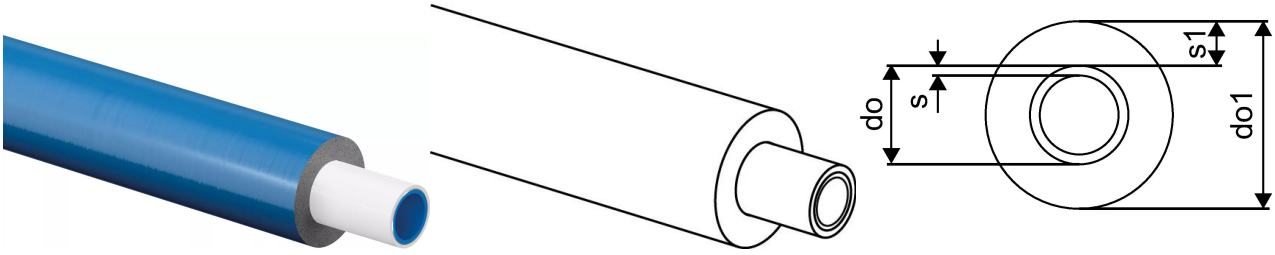

Product code

Item no EAN	4021598124486
Item no GF	35001063558
Item no GTIN	04021598124486
Item no VVS	087483125

Dimensions

Item Unit Height	37
Item Unit Length	1000
Item Unit Weight	0,272
Item Unit Width	37
Item_UOM	m

Measurements

Outer Diameter_do	25
Outer Diameter_do1	37
Wall thickness_s	2,5
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905413508
Packaging GTIN PL4	06414905413515
Packaging Height PL1	205
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	50
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,266418
Packaging Volume PL4	2,5992
Packaging Weight PL1	13,736
Packaging Weight PL4	119,3
Packaging Width PL1	1140
Packaging Width PL4	1140

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+