


Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

- coil
- Insulation thickness 6 mm
- thermal conductivity $\lambda=0,035 \text{ W/m}\cdot\text{k}$
- round extruded

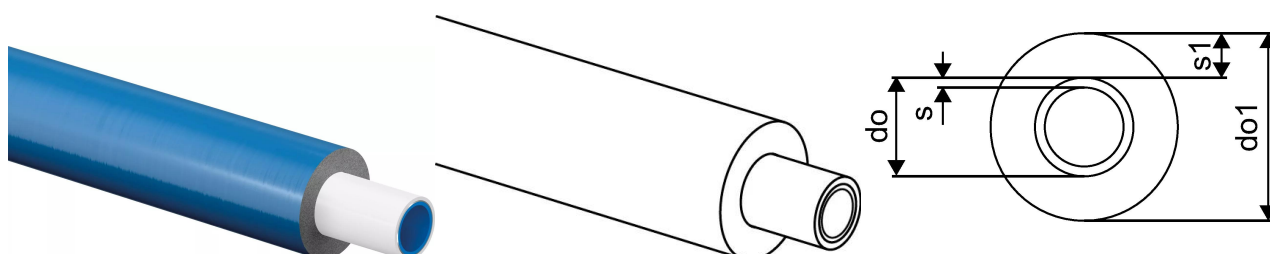

Application information Uponor Uni Pipe PLUS white insulated S6 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

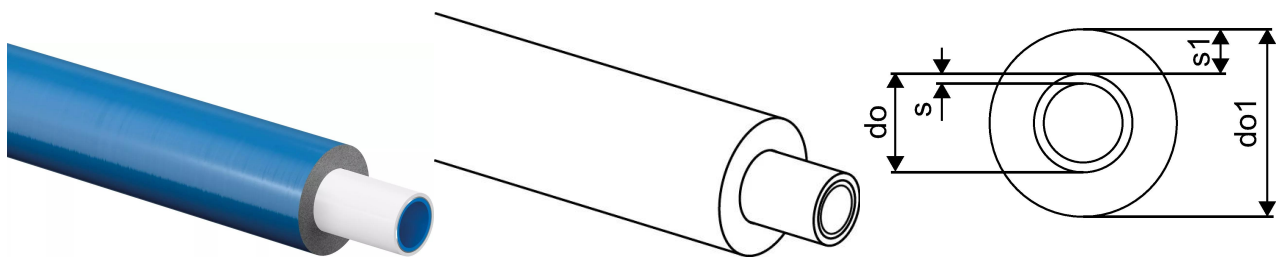

Technical data

Item (unit of measurement)	m
Item no VVS	087483125
Packaging Quantity PL1	50
Packaging Quantity PL4	400

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com