


## Uponor Comfort Pipe PLUS 25x2,3 640m

1063907

- 6 bar at 90°C
- Application class 4 and 5

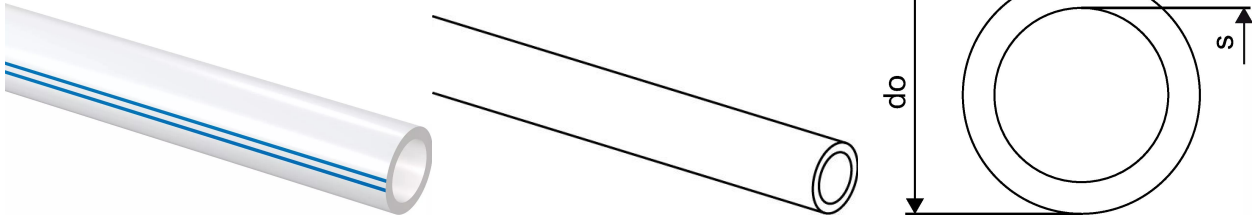

### Application information Uponor Comfort Pipe PLUS

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 25x2,3 640m

1063907



### Product code

Item no EAN	7321500056735
Item no GF	35001063907
Item no GTIN	07321500056735
Item no LVI	2012138
Item no RSK	2419900
Item no VVS	087225164

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905414918
Packaging Height PL1	580
Packaging Length PL1	1050
Packaging Quantity PL1	640
Packaging Type PL1	Coil
Packaging Volume PL1	0,63945
Packaging Weight PL1	107,52
Packaging Width PL1	1050

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com