


## Uponor Vario compression adapter PEX 16x1,8/2,0-G3/4"FT Euro

1065284

- Eurocone
- Brass

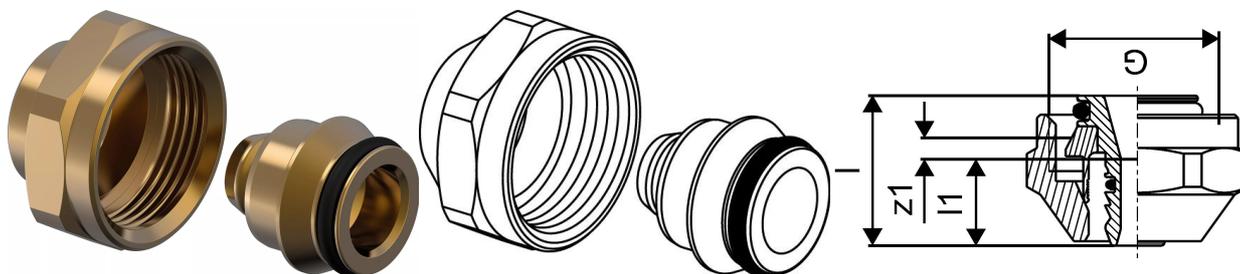

### Application information Uponor Vario compression adapter PEX

#### Specification


- Components made of brass, nickel-plated brass, steel, and engineered plastics
- Eurocone, threaded, and flat-sealing connections
- Compatible with Vario B, C, S, M, PLUS, and MAGNA manifolds
- Includes valves, flowmeters, air vents, actuators, and adapters
- Designed for heating and cooling applications

#### Application

- Completion and extension of Vario manifold installations
- Flow regulation, balancing, and shut-off
- Connection of PEX, MLCP, and composite pipes
- Integration of actuators, sensors, and control units
- Commissioning, maintenance, and system optimization

## Uponor Vario compression adapter PEX 16x1,8/2,0-G3/4"FT Euro

1065284

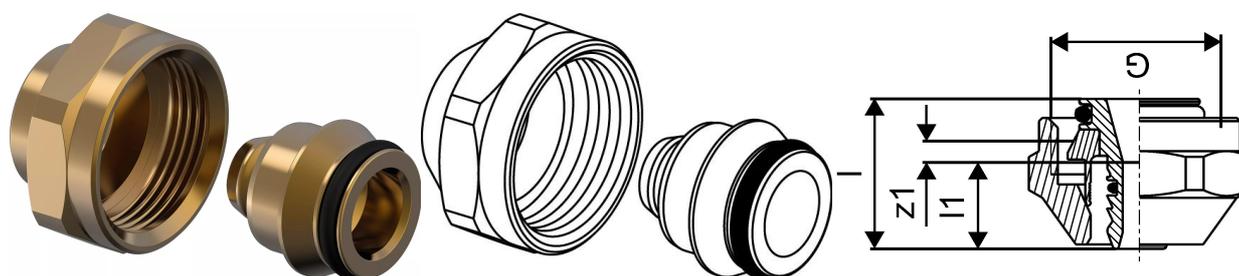

### Measurements

Cylindric_thread_G	0,75
LENGTH_L	22,5
Length (l1)	12,9
Wall thickness_s	1,8/2,0
z1	3

### Product code

Item no EAN	4021598127906
Item no GF	35001065284
Item no GTIN	04021598127906
Item no LVI	2024323
Item no NRF	8361264
Item no RSK	2434744
Item no VVS	045467016

### Dimensions

Item Unit Height	30
Item Unit Length	30
Item Unit Weight	0,05
Item Unit Width	30
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905415359
Packaging GTIN PL3	06414905415366
Packaging GTIN PL4	06414905415373
Packaging Height PL1	31
Packaging Height PL3	89
Packaging Height PL4	411
Packaging Length PL1	31

Packaging Length PL3	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	25
Packaging Quantity PL4	2400
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000029791
Packaging Volume PL3	0,00211464
Packaging Volume PL4	0,39456
Packaging Weight PL1	0,06
Packaging Weight PL3	1,289
Packaging Weight PL4	145
Packaging Width PL1	31
Packaging Width PL3	135
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)