
# Product data sheet




# GF Uponor S-Press PLUS adapter female thread FT 20-Rp1/2"

## 1070516

- Made of tin-plated DR brass (lead-free)

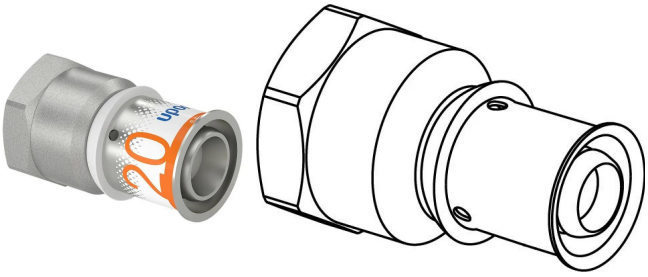




## Application information GF Uponor S-Press PLUS adapter female thread FT

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:
- Male and female threads acc.to EN 10226-1.


### Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

# GF Uponor S-Press PLUS adapter female thread FT 20-Rp1/2"

## 1070516

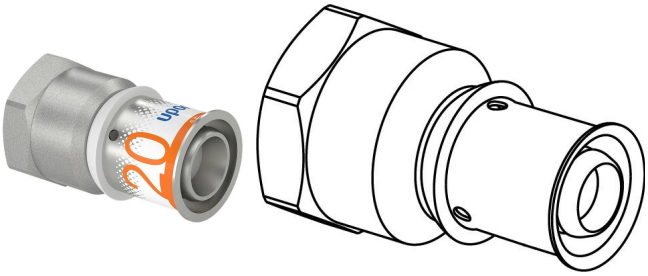




### Measurements

| | |
|---|---|
| Female thread Rp | 1/2 |
| LENGTH_L | 46,5 |
| Length (l1) | 15 |
| Length (l2) | 21,3 |
| z1 | 10,2 |

### Product code

| | |
|---|---|
| Item no EAN | 6414905218363 |
| Item no GF | 35001070516 |
| Item no GTIN | 06414905218363 |
| Item no LVI | 1720182 |
| Item no NOBB | 55171877 |
| Item no NRF | 5114442 |
| Item no RSK | 1899421 |
| Item no VVS | 045482239 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 30.5 |
| Item Unit Length | 46.5 |
| Item Unit Weight | 0,079 |
| Item Unit Width | 27 |
| Item_UOM | pce |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905468324 |
| Packaging GTIN PL3 | 06414905424085 |
| Packaging GTIN PL4 | 06414905499250 |
| Packaging Height PL1 | 89 |

| | |
|---|---|
| Packaging Height PL3 | 188 |
| Packaging Height PL4 | 708 |
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 15 |
| Packaging Quantity PL3 | 120 |
| Packaging Quantity PL4 | 5760 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,009321604 |
| Packaging Volume PL4 | 0,67968 |
| Packaging Weight PL1 | 1,225 |
| Packaging Weight PL3 | 9,93 |
| Packaging Weight PL4 | 500,64 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

## Documents

Page with all documents

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**



**Uponor Corporation**

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+