


## Uponor S-Press PLUS elbow male thread 20-R1/2"MT

**1070533**

- Made of tin-plated DR brass

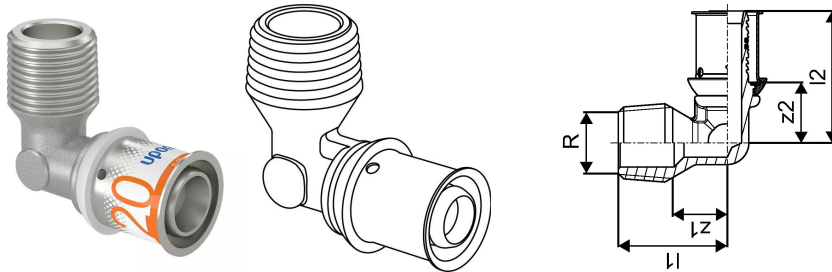

### Application information Uponor S-Press PLUS elbow male thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS elbow male thread 20-R1/2"MT

1070533

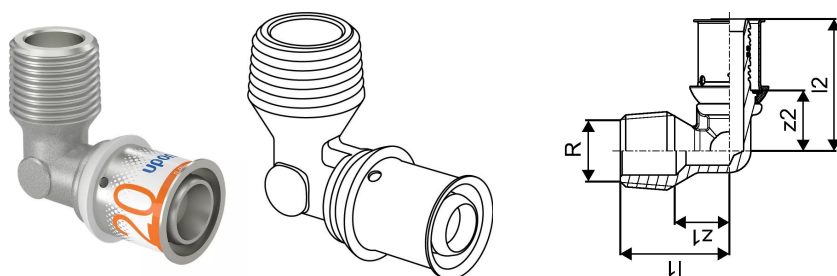

## Technical data

Item (unit of measurement)	pce
Item no VVS	045471239
Item no LVI	1720195
Item no NRF	5114461
Length (l1)	32 mm
Length (l2)	41 mm
Z-measurement z2	19 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840

## Documents

[Page with all documents](#)


## Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)