


Uponor S-Press PLUS elbow male thread 20-R3/4"MT

1070534

- Made of tin-plated DR brass

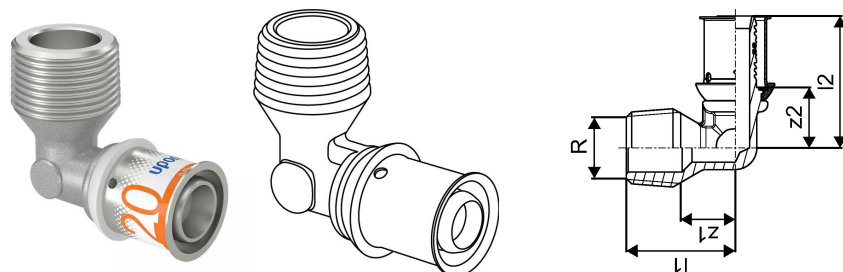

Application information Uponor S-Press PLUS elbow male thread

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow male thread 20-R3/4"MT

1070534

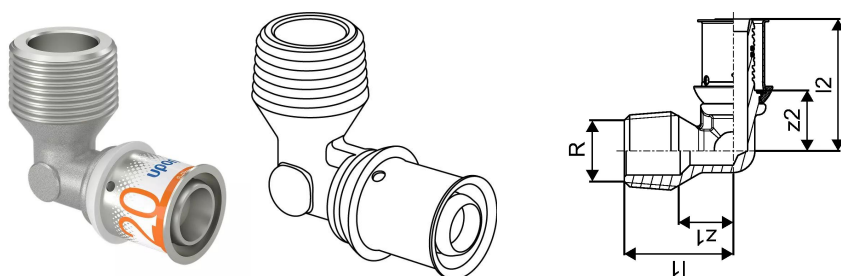

Technical data

Item no EAN	6414905218547
Item no GTIN	06414905218547
Item no VVS	045471246
RSK no.	1896536
Item no NRF	5114462
Item no LVI	1720196
Item (unit of measurement)	pce
Length (l1)	34 mm
Length (l2)	41 mm
Z-measurement z2	19 mm
Packaging Quantity 1	10
Packaging Quantity 3	80
Packaging Quantity 4	3840
Packaging GTIN PL1	06414905468454
Packaging GTIN PL3	06414905424238
Packaging GTIN PL4	06414905499380
Item Unit Length	54
Item Unit Height	47
Item Unit Weight	0,101
Item Unit Width	27

Documents

Page with all documents



Finland

T +358 (0)20 129 211

www.uponor.com