


Uponor S-Press PLUS elbow adapter male thread 25-R3/4"MT

1070535

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access

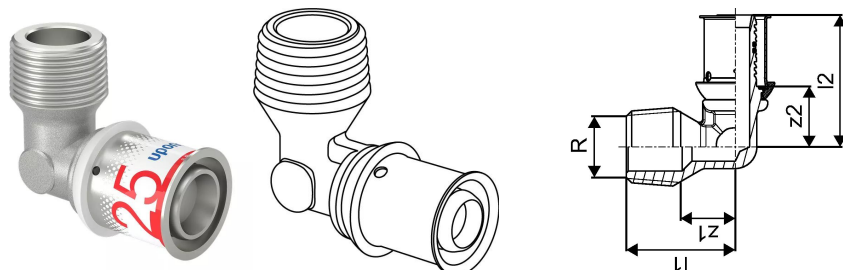

Application information Uponor S-Press PLUS elbow adapter male thread

Specification

- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indicator
- Easy size identification
- Unpressed leak-path safety feature
- Fast

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press PLUS elbow adapter male thread 25-R3/4"MT

1070535

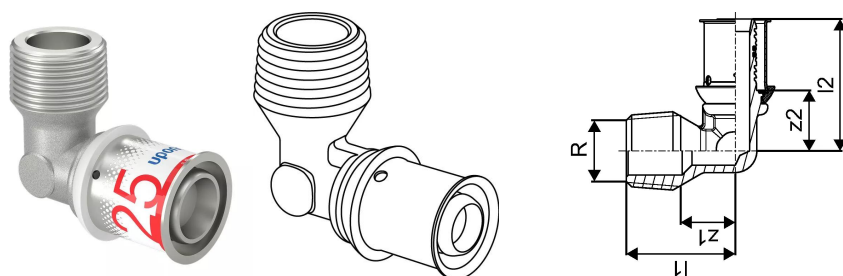

Technical data

Item Quantity 1	5
Item Quantity 2	40
Item (unit of measurement)	pce
Outside diameter	25 mm
Length (l1)	36 mm
Length (l2)	48 mm
Male thread R	3/4 inch
Z-measurement z1	20 mm
Z-measurement z2	19 mm

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com