


## Uponor S-Press PLUS tee equal 32-32-32

**1070563**

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access

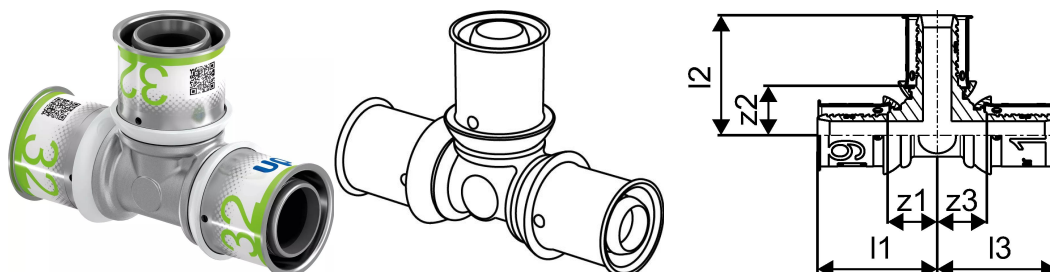

### Application information Uponor S-Press PLUS tee equal

#### Specification

- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indicator
- Easy size identification
- Unpressed leak-path safety feature
- Fast

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

#### Certification

- WRAS
- DVGW
- KIWA

## Uponor S-Press PLUS tee equal 32-32-32

1070563

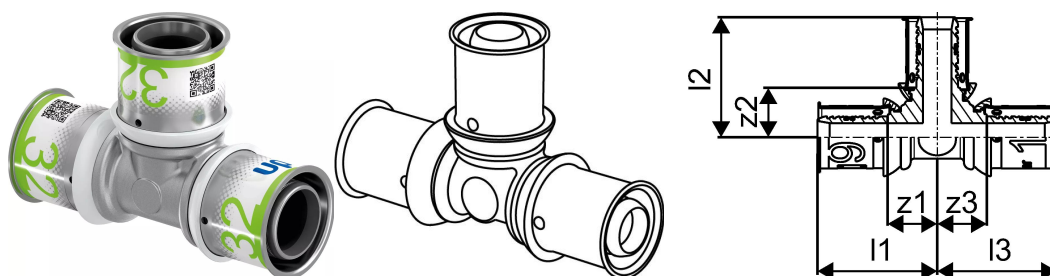

### Technical data

Item Quantity 1	5
Item Quantity 2	20
Item (unit of measurement)	pce
Outside diameter	32 mm
Length (l1)	51 mm
Length (l2)	51 mm
Length (l3)	51 mm
Z-measurement z1	23 mm
Z-measurement z2	23 mm
Z-measurement z3	23 mm

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com