


Uponor S-Press PLUS tee reducer 25-20-16

1070575

- Made of tin-plated DR brass

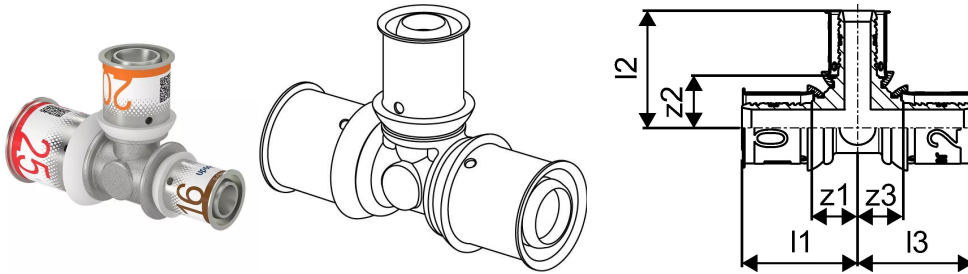

Application information Uponor S-Press PLUS tee reducer

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee reducer 25-20-16

1070575

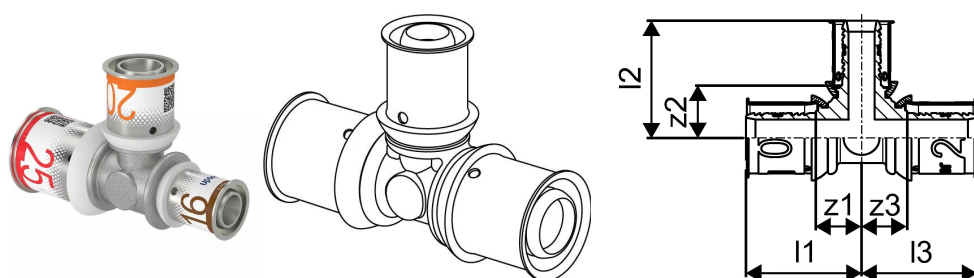

Technical data

Item (unit of measurement)	pce
Item no VVS	045476335
Item no LVI	1720757
Item no NRF	5114501
Length (l1)	44 mm
Length (l2)	40 mm
Length (l3)	36 mm
Z-measurement z2	19 mm
Z-measurement z3	17 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	40
Packaging Quantity PL4	1920

Documents

[Page with all documents](#)


Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com