


Uponor S-Press PLUS tee reducer 25-25-16

1070578

- Made of tin-plated DR brass

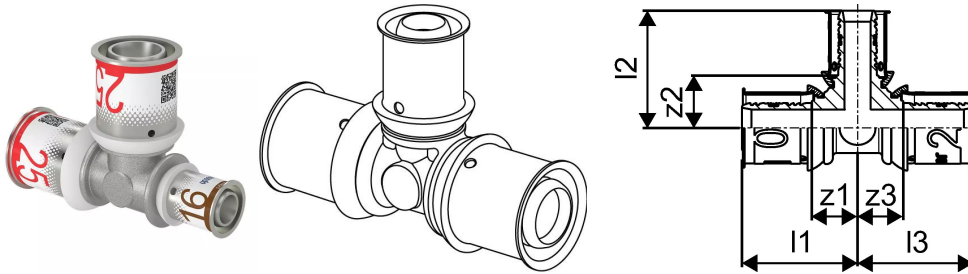

Application information Uponor S-Press PLUS tee reducer

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee reducer 25-25-16

1070578

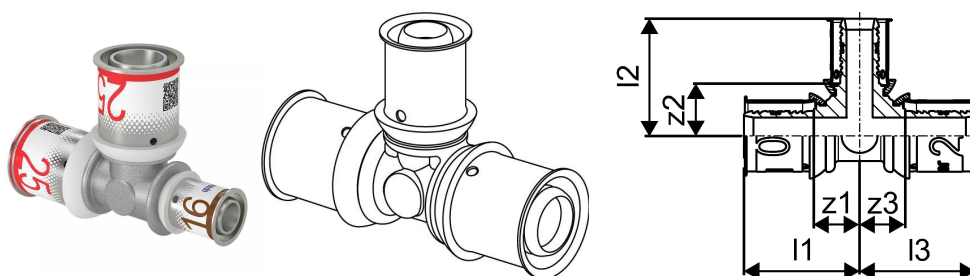

Technical data

Item (unit of measurement) pce

Item no VVS 045476309

Item no LVI 1720760

Item no NRF 5114504

Length (I1) 47 mm

Length (I2) 47 mm

Length (I3) 38 mm

Z-measurement z2 19 mm

Z-measurement z3 19 mm

Packaging Quantity PL1 5

Packaging Quantity PL3 20

Packaging Quantity PL4 1920

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com