


## Uponor S-Press PLUS tee reducer 25-32-25

1070579

- Made of tin-plated DR brass

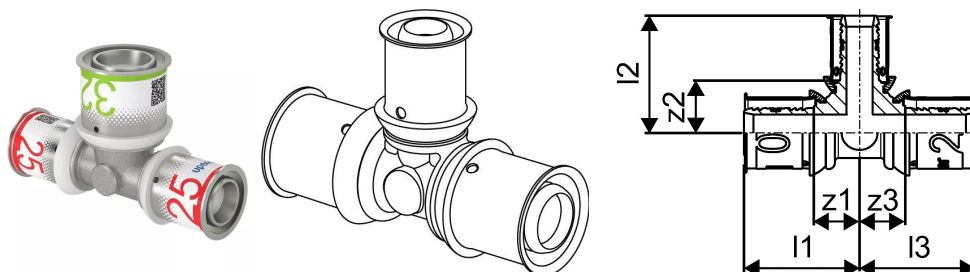

### Application information Uponor S-Press PLUS tee reducer

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee reducer 25-32-25

1070579

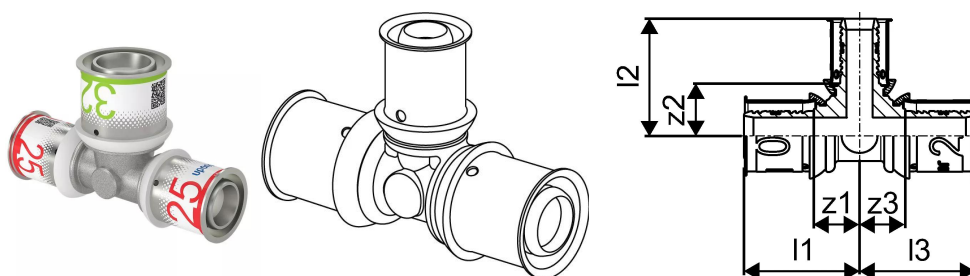

### Technical data

Item (unit of measurement)	pce
Item no VVS	045476316
Item no LVI	1720761
Item no NRF	5114505
Length (l1)	50 mm
Length (l2)	48 mm
Length (l3)	50 mm
Z-measurement z2	20 mm
Z-measurement z3	22 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	960

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com