


## Uponor S-Press PLUS tee reducer 32-16-32

1070580

- Made of tin-plated DR brass

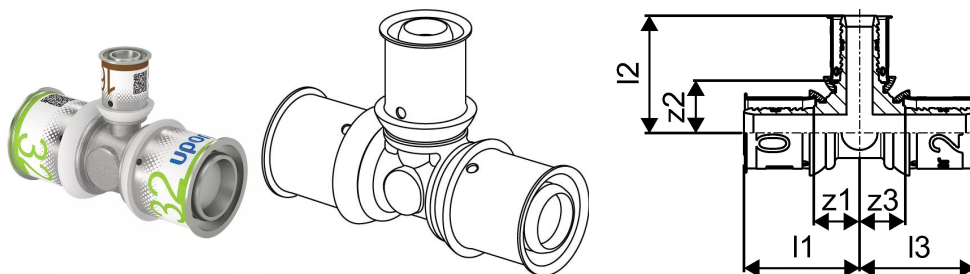

### Application information Uponor S-Press PLUS tee reducer

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee reducer 32-16-32

1070580

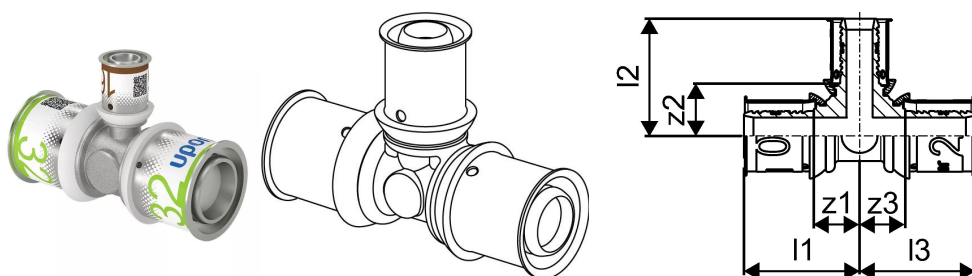

### Technical data

Item (unit of measurement) pce

Item no VVS 045476365

Item no LVI 1720762

Item no NRF 5114506

Length (l1) 43 mm

Length (l2) 42 mm

Length (l3) 50 mm

Z-measurement z2 22 mm

Z-measurement z3 15 mm

Packaging Quantity PL1 5

Packaging Quantity PL3 20

Packaging Quantity PL4 960

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com