
Product data sheet



GF Uponor S-Press PLUS adapter 25-28CU

1070619

- Made of tin-plated DR brass (lead-free)

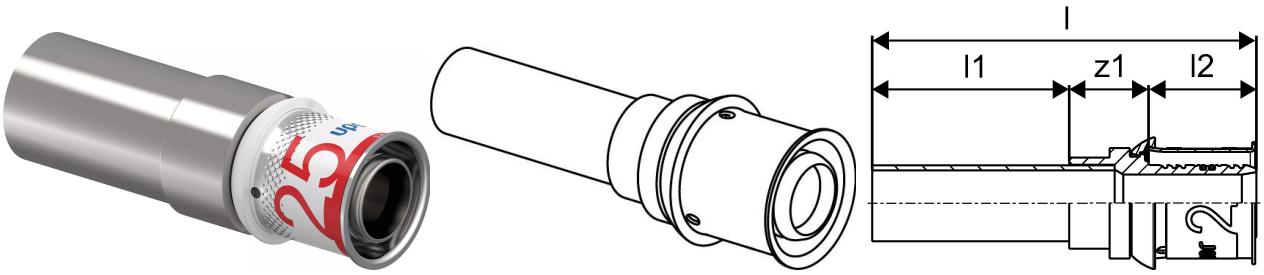

Application information GF Uponor S-Press PLUS adapter

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:
- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS adapter 25-28CU

1070619

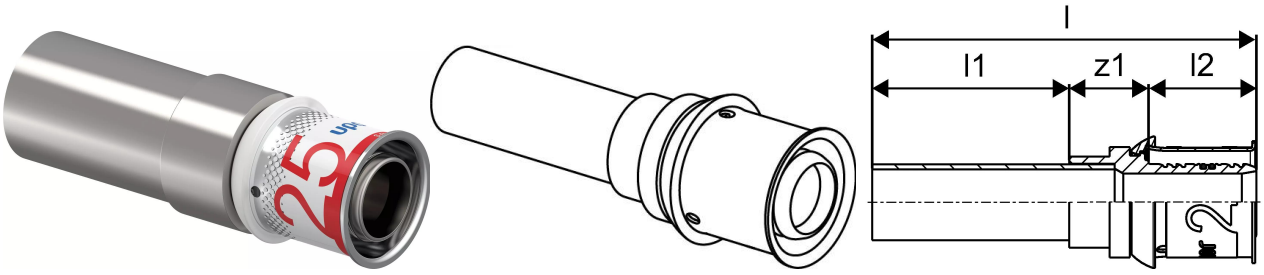

Product code

Item no EAN	6414905219391
Item no GF	35001070619
Item no GTIN	06414905219391
Item no LVI	1720793
Item no NOBB	55171385
Item no NRF	5114541
Item no RSK	1899444
Item no VVS	045485025

Dimensions

Item Unit Height	32.3
Item Unit Length	92
Item Unit Weight	0,135
Item Unit Width	32.3
Item_UOM	pce

Measurements

LENGTH_L	92
Length (l1)	43
Length (l2)	28,3
z1	20,7

Packaging

Packaging GTIN PL1	06414905468799
Packaging GTIN PL4	06414905499724
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176

Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,712
Packaging Weight PL4	298,56
Packaging Width PL1	67
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+