


## Uponor S-Press PLUS U-tap elbow 20-Rp1/2"FT-25

1070635

- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

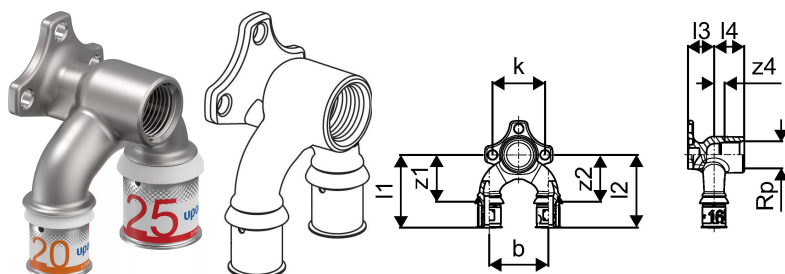

### Application information Uponor S-Press PLUS U-tap elbow

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS U-tap elbow 20-Rp1/2"FT-25

1070635

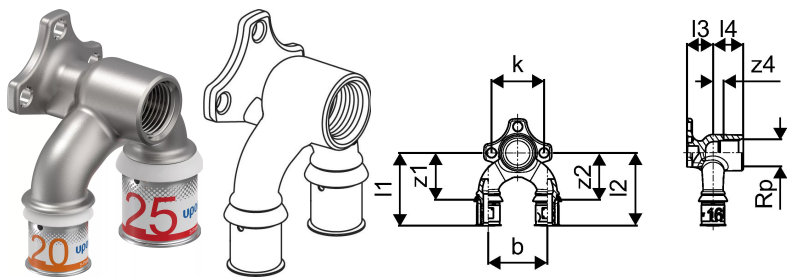

Technical data

|                            |          |
|----------------------------|----------|
| Item (unit of measurement) | pce      |
| Female thread Rp           | 1/2 inch |
| Length (l1)                | 57 mm    |
| Length (l2)                | 64 mm    |
| Length (l3)                | 27 mm    |
| Z-measurement k            | 40 mm    |
| Z-measurement b            | 60 mm    |
| Z-measurement z2           | 36 mm    |
| Z-measurement z4           | 9 mm     |
| Packaging Quantity PL1     | 3        |
| Packaging Quantity PL4     | 576      |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com